
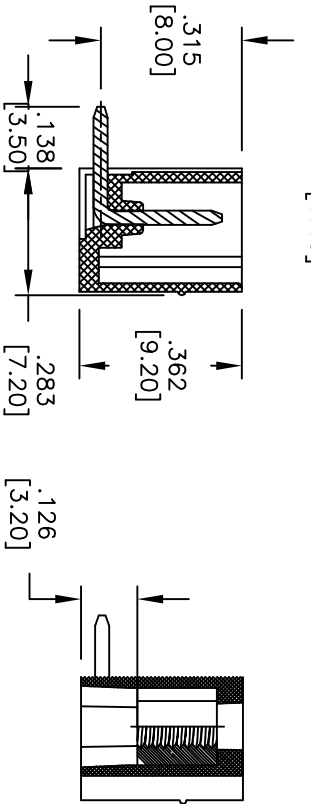
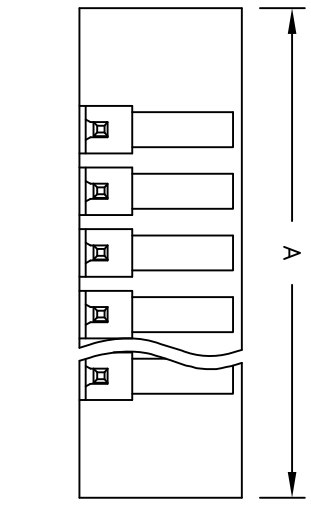
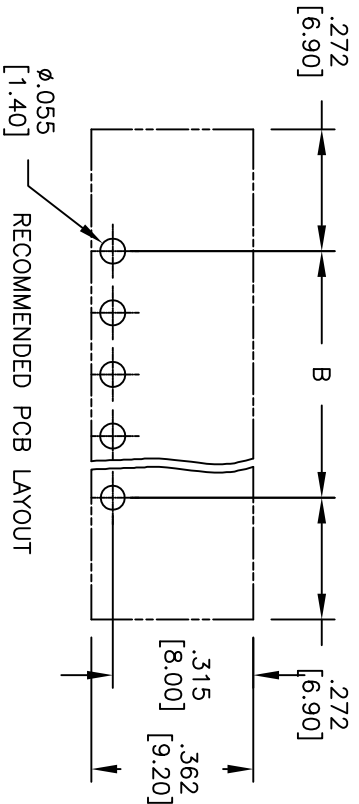


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/24/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

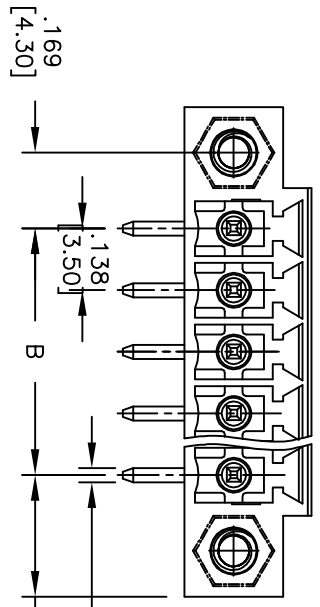

**SPECIFICATIONS:**

Material: Thermoplastic, rated UL 94V-0

Insulator color: Green  
 Contact: Copper Alloy, Tin plated  
 Flange Nut: Brass, M2.5

**A**

Electrical:  
 Operation voltage: 300 VAC max  
 Current rating: 10 Amps max  
 Withstanding voltage: 1.6KV

**Environmental:**

Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.

Poles: 2 thru 24  
 A = .138 [3.50] x No. of (Poles - 1) + .543 [13.80]  
 B = .138 [3.50] x No. of (Poles - 1)

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710



APPROVALS	DATE
DRAWN DY	3/24/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB3-XX-A-E	-

REF: S00007 SCALE: NTS SHEET 1 OF 1