
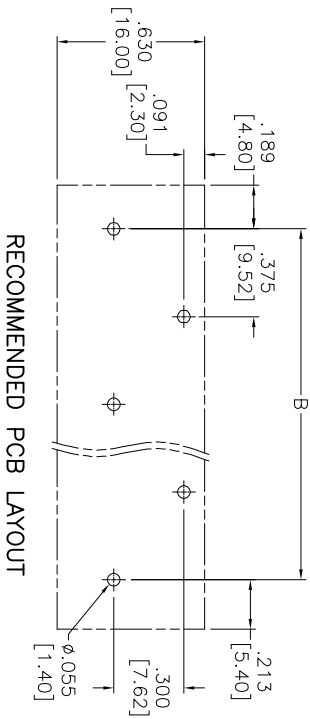





Rev	AWO #	Description	Date	Appr
-		RELEASED	8/14/14	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

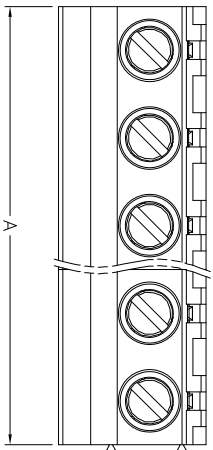

RECOMMENDED PCB LAYOUT

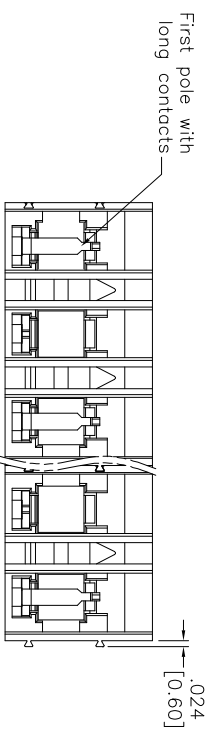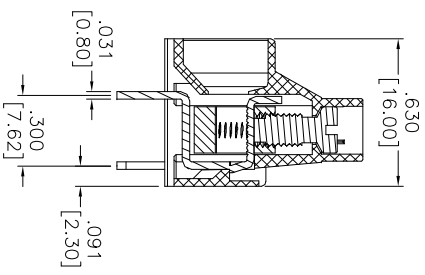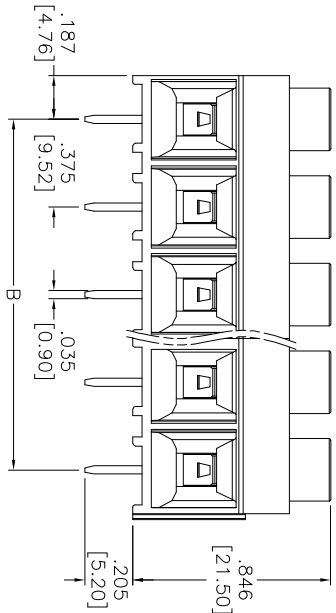

**SPECIFICATIONS:**

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Clamp: Brass, Nickel plated
- Screw: M3.5, Steel, Zn plated.
- Contact: Copper Alloy, Tin plated.
- Electrical: Operation voltage: 690 VAC
- Current rating: 32 Amps
- Mechanical: Wire strip length: 7-8mm
- Torque (Lb-In): 5.5
- Solid wire: 10-24 AWG
- Stranded: 10-24 AWG
- Withstanding Voltage: 2.2KV
- Temperature Rating: Operating temperature: -40°C to +115°C
- Environmental: Lead free, RoHS compliant.



Positions: 02 thru 16  
 A = .375 [9.52] X No. of Positions  
 B = .375 [9.52] X No. of Spaces

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.010 [0.25]
13-16P	±.014 [0.35]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	ØXX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXXX ±.010
APPROVALS	DATE
DRAWN AY	8/14/14
CHECKED LL	8/14/14
APPROVED	

TITLE		PART NO.		REV.
TERMINAL BLOCK, PCB, VERTICAL, 9.52MM PITCH		EB4-XX-N-DR		
DOUBLE ROW PIN		SIZE	PART NO.	REV.
		X		
REF:	S00007T	SCALE:	NTS	SHEET 1 OF 1