



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/5/12	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

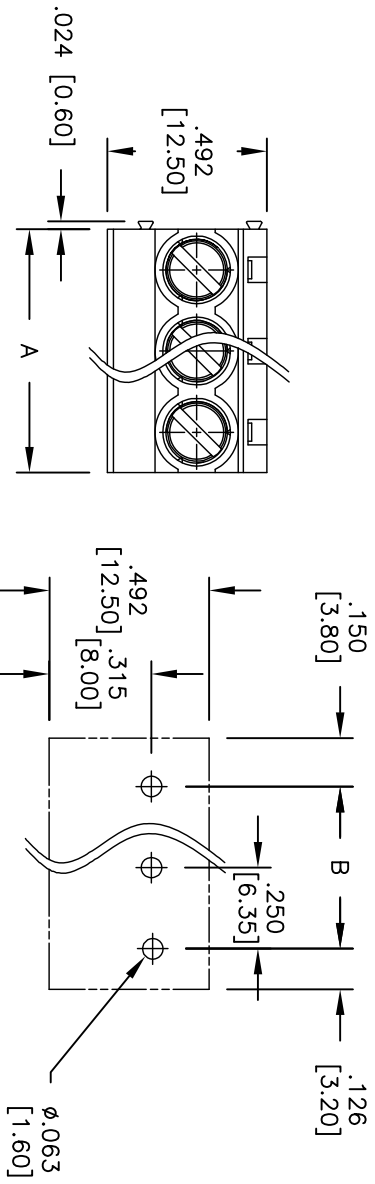

RECOMMENDED PCB LAYOUT

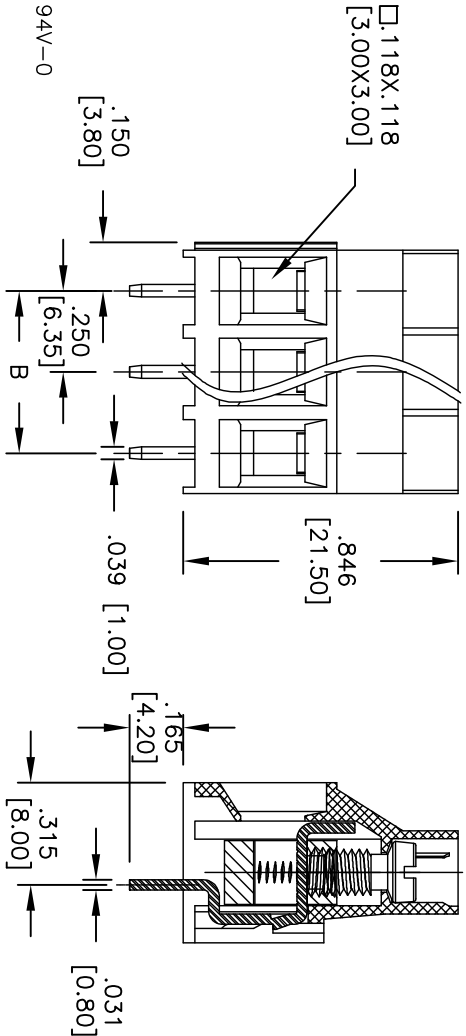

	Tolerance
2-6P	±.006 [0.15]
7-11P	±.010 [0.25]
12-16P	±.014 [0.35]

Positions: 02 thru 16  
 A = .250 [6.35] X No. of Positions  
 B = .250 [6.35] x No. of Spaces

**SPECIFICATIONS:**  
 Material: Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Clamp: Brass, Nickel plated  
 Screw: M3.5, Steel, Zn plated.  
 Contact: Copper Alloy, Tin plated.  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 10 Amps  
 Mechanical:  
 Wire strip length: 6-7mm  
 Torque (lb-in): 6.9  
 Wire Range: 10-24 AWG  
 Withstanding Voltage: 1.6KV  
 Environmental:  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE IN MM	
TOLERANCES: EXCEPT AS NOTED	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

DRAWN AY		1/5/12		DATE	
CHECKED AL		1/5/12		DATE	
APPROVED		SIZE X		PART NO. EB4-XX-P-BK	
TITLE		TERMINAL BLOCK, PCB, VERTICAL			
DRAWN		.250 [6.35]MM PITCH, BLACK			
CHECKED		SCALE: NTS		SHEET 1 OF 1	
APPROVED		REV.			