



| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 9/26/11 | |

APPROVED: _____
 DATE: _____ TITLE: _____

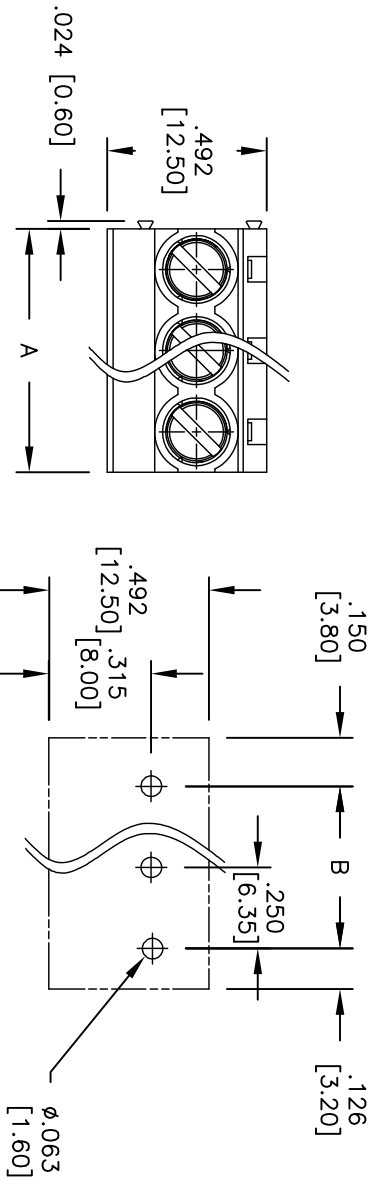

RECOMMENDED PCB LAYOUT

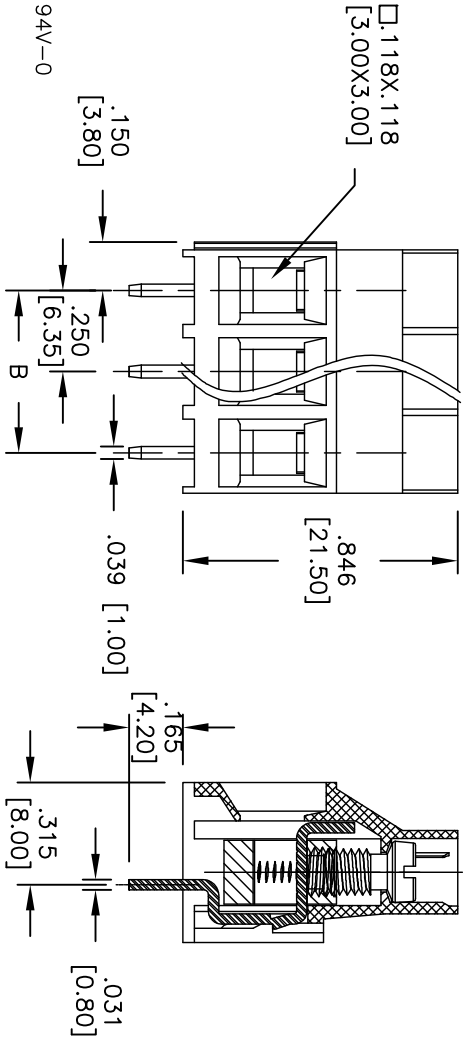

A = .250 [6.35] X No. of Positions
 B = .250 [6.35] x No. of Spaces

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Grey
- Clamp: Brass, Nickel plated
- Screw: M3.5, Steel, Zn plated.
- Contact: Copper Alloy, Tin plated.
- Electrical: Operation voltage: 300 VAC
- Current rating: 10 Amps
- Mechanical: Wire strip length: 6-7mm
- Torque (Lb-In): 6.9
- Wire Range: 10-24 AWG
- Withstanding Voltage: 1.6KV
- Environmental: Operating temperature: -40°C to +115°C
- Lead free, RoHS compliant.
- Recommended soldering temp: 235°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PCB, VERTICAL
 .250 [6.35]MM PITCH, GREY

| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM TOLERANCES: EXCEPT AS NOTED INCHES | | HOLDERS | | DATE | |
|---|--------|---------|-------------|-------------------------------|--------|
| .X | ± .10 | ØX | ± .10 | | |
| .XX | ± .020 | ØXXX | ± .015 | | |
| .XXX | ± .015 | ØXXXX | ± .010 | | |
| APPROVALS | | DATE | | TITLE | |
| DRAWN | TW | 9/26/11 | | TERMINAL BLOCK, PCB, VERTICAL | |
| CHECKED | AY | 9/26/11 | | .250 [6.35]MM PITCH, GREY | |
| APPROVED | | SIZE | PART NO. | SCALE | REV. |
| | | X | EB4-XX-P-GY | NTS | A |
| | | REF: | S00007T | SHEET | 1 OF 1 |