
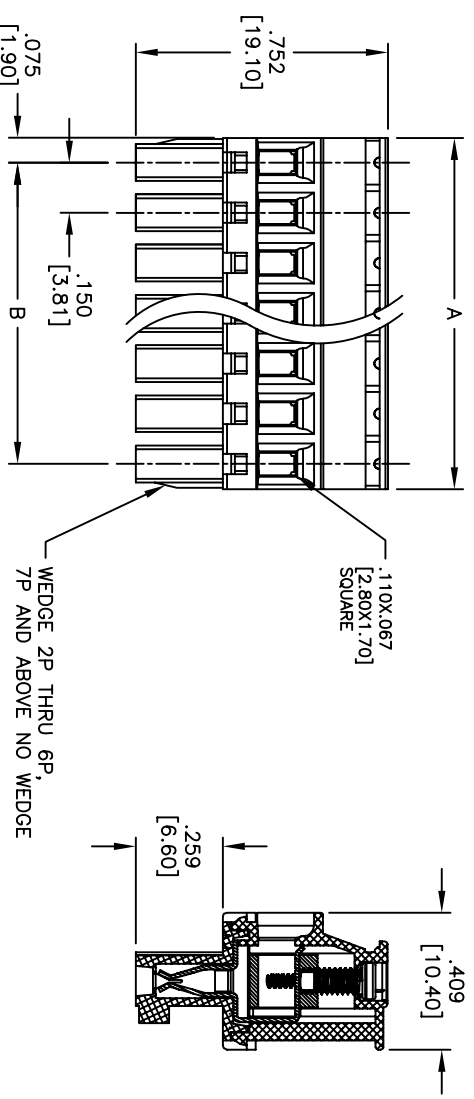


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/07	

APPROVED: _____
 DATE: _____ TITLE: _____

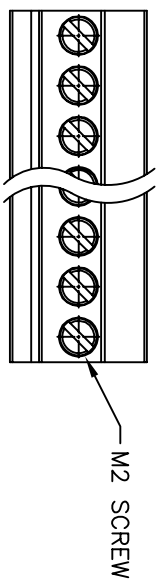

2 thru 24 Poles Available
 A = # of Poles X .150" [3.81mm]
 B = # of Poles - 1 X .150" [3.81mm]

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Wire Guard: Phosphor Bronze, Tin plated
- Terminal Body: Brass, Zinc plated
- Screw: Steel, Zinc plated
- Electrical: Operation voltage: 300V max
- Current rating: 8 Amps max per Pole
- Insulation resistance: 5000 Mohms min @ 1000V
- Dielectric withstanding voltage: 1600 VAC for 1 minute
- Mechanical: Recommended Screw Torque: 1.7 Lb-in
- Wire Range: Solid Wire: 16 - 28 Awg
- Stranded Wire: 16 - 28 Awg
- Recommended Wire Strip = .236"-.275" [6-7mm]
- Environmental: Operating temperature: -30°C to +105°C



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE	
INCHES	± .10	ØXX	± .015
HOLES	± .015	ØXXX	± .010
APPROVALS	DATE	ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
DRAWN	SS	6/13/07	EURO BLOCK, 3.81mm PLUGGABLE 2 THRU 24 POLES
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE:	REV.
X	EB5-XX-B	NTS	-
REF:			SHEET 1 OF 1