
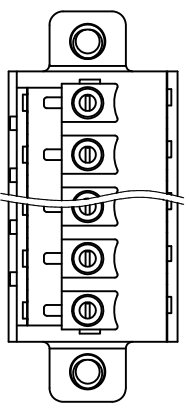
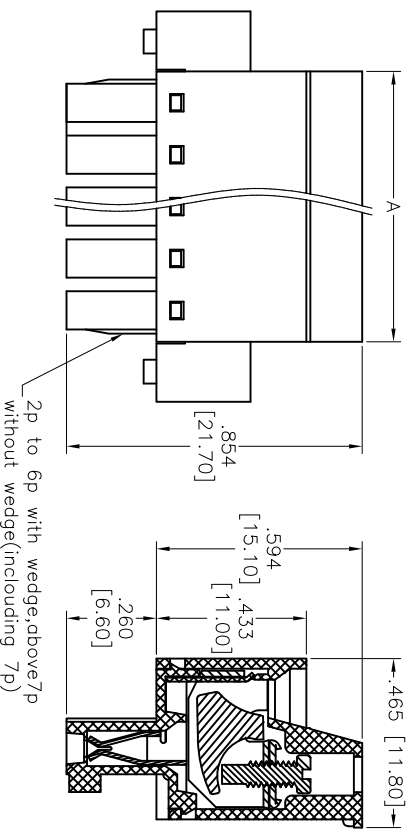


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/05/11	

APPROVED: _____

DATE: _____ TITLE: _____

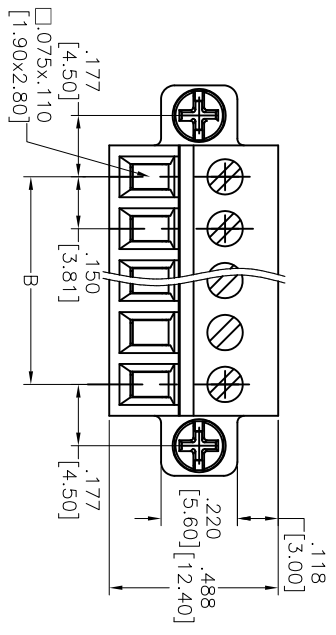

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Phosphor Bronze, Tin plated
 Clamp: Steel, Zn plated
 Screw: Steel, M2/Zn plated
 With flange Screw: Steel, M2.5/Zn plated

Electrical:
 Operation voltage: 300 VAC
 Current rating: 10 Amps
 Withstanding Voltage: 1.6KV

Mechanical:
 Solid wire (AWG): 16-28
 Stranded wire (AWG): 16-28
 Torque(mm): 1.7
 Wire strip length(mm): 6-7

Temperature Rating:
 Operating temperature: -40°C to +115°C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 250°C for 5 sec.

Positions: 2 thru 24
 A = .150 [3.81] x No. of Positions + .031 [0.80]
 B = .150 [3.81] x No. of Spces

Positions	Tolerance
2-6P	±.008 [0.20]
7-12P	±.010 [0.25]
13-18P	±.012 [0.30]
19-24P	±.016 [0.40]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .150 [3.81] PITCH, WITH FLANGE

UNLESS OTHERWISE SPECIFIED		TOLERANCES ARE NOTED	
ALL DIMENSIONS ARE INCHES [MM]		HOLDS	
.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS		DATE	
DRAWN	TW	10/05/11	
CHECKED	AY	10/05/11	
APPROVED			

TITLE		SIZE		PART NO.		REV.	
EURO BLOCK, .150 [3.81] PITCH, WITH FLANGE		X		EB6-XX-B-E		-	
REF:	S00007T	SCALE:	NIS	SHEET	1	OF	1



6 5 4 3 2 1