


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/2/11	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

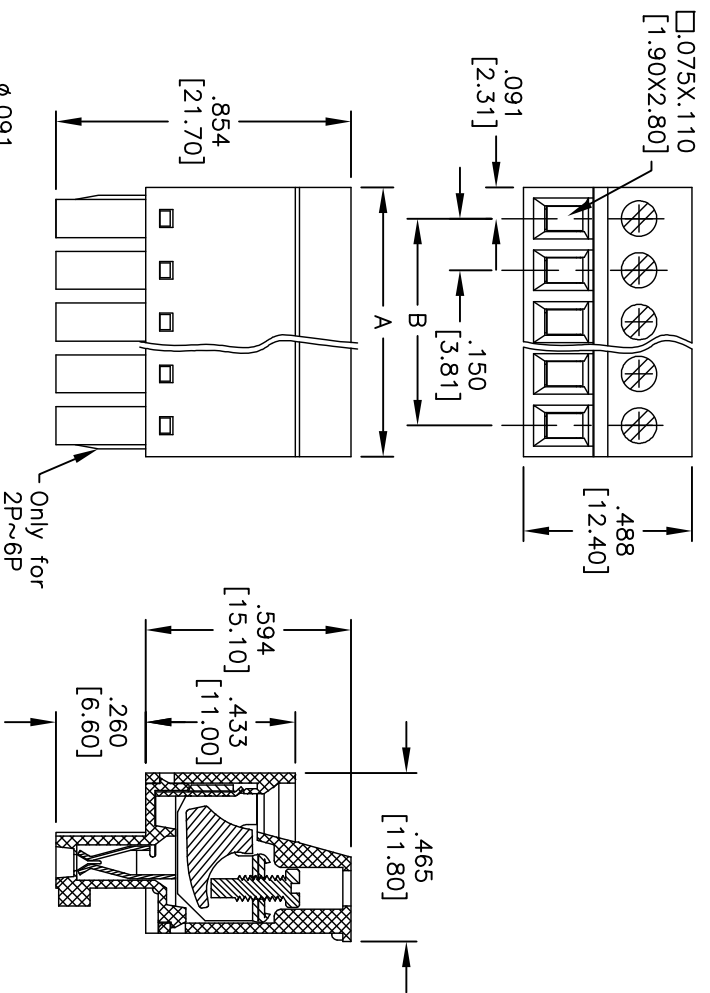

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Clamp: Brass, Zn plated.  
 Screw: M2.0, Steel, Zn plated.  
 Contact: Copper Alloy, Tin plated.  
 Clampcage: Steel, Zn plated.  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 10 Amps  
 Mechanical:  
 Wire strip length: 6-7mm  
 Torque (Lb-In): 1.7  
 Wire Range: 16-28 Awg  
 Withstanding Voltage: 1.6KV  
 Environmental:  
 Operating temperature: -40°C to +115°C  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.

Poles: 2 thru 24  
 A = .150 [3.81] X No. of Spaces + 181 [4.61]  
 B = .150 [3.81] X No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLES  
 .X ± .10  $\phi$ X ± .10  
 .XX ± .020  $\phi$ XX ± .015  
 .XXX ± .015  $\phi$ XXX ± .010



<p><b>ADAM TECH</b>          909 Rohway Avenue, Union, NJ 07083          Phone: 908-687-5000 Fax: 908-687-5710</p>		<p>TITLE  <b>EURO BLOCK, .150 [3.81] PITCH</b></p>					
<p>APPROVALS</p> <table border="1"> <tr> <th>DATE</th> <th>DATE</th> </tr> <tr> <td>3/2/11</td> <td></td> </tr> </table>	DATE	DATE	3/2/11		<p>SIZE          X</p>	<p>PART NO.          EB6-XX-B</p>	<p>REV.          -</p>
DATE	DATE						
3/2/11							
<p>DRAWN          AY</p>	<p>CHECKED          JL</p>	<p>DATE          3/2/11</p>	<p>SCALE: NTS</p>				
<p>APPROVED</p>	<p>REF: S00007</p>	<p>SHEET 1 OF 1</p>					