
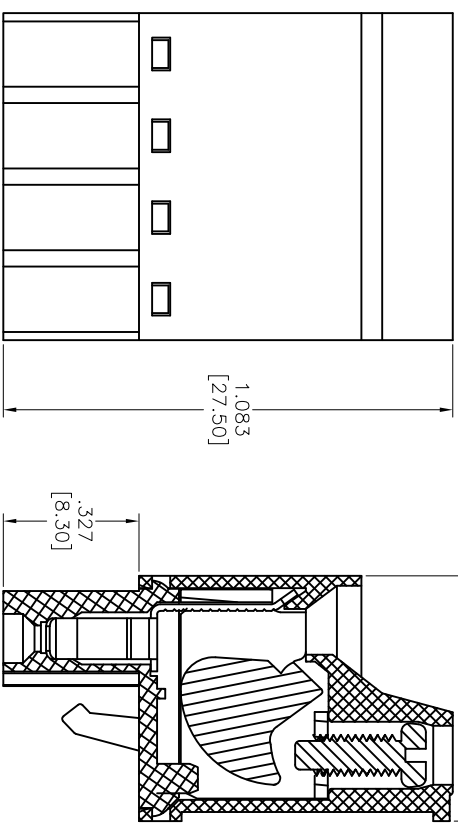


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/05/11	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

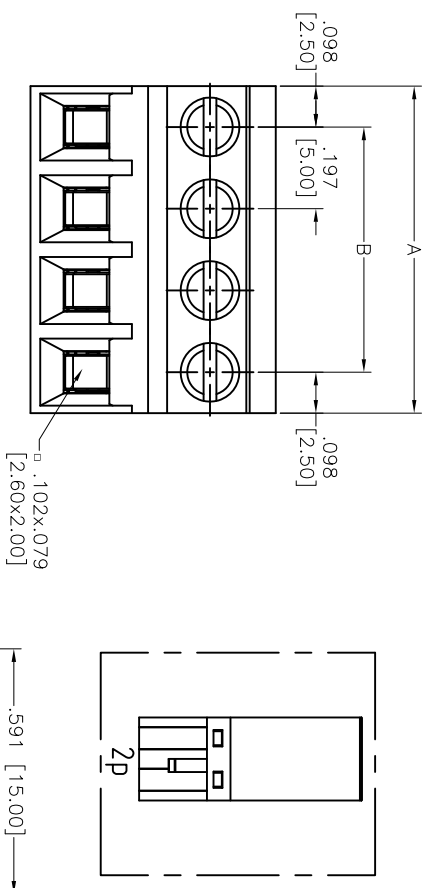

Positions: 2 thru 24  
 A = .197 [5.00] x No. of Positions  
 B = .197 [5.00] x No. of Spaces

Positions	Tolerance
2-6P	±.008 [0.20]
7-12P	±.010 [0.25]
13-18P	±.012 [0.30]
19-24P	±.016 [0.40]

**SPECIFICATIONS:**

**Material:**  
 Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Clamp: Steel, Zn plated  
 Contact: Phosphor Bronze, Tin plated  
 Screw: Brass, M2.5/Zn plated

**Electrical:**  
 Operation voltage: 300 VAC  
 Current rating: 20 Amps  
 Withstanding Voltage: 1.6KV

**Mechanical:**  
 Wire range(mm<sup>2</sup>): 0.34-2.5  
 Solid wire (AWG): 12-22  
 Stranded wire (AWG): 12-22  
 Torque(lb-in): 3.5  
 Wire strip length(mm): 6-7

**Operating temperature:** -40°C to +115°C

**Environmental:**  
 Lead free, RoHS compliant.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**EURO BLOCK, .197 [5.00] PITCH**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES EXCEPT AS NOTED			
.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS			
DRAWN	TW	DATE	
CHECKED	AY	10/05/11	
APPROVED			

SIZE	PART NO.	REV.
X	EB6-XX-C	-
REF:	S00007T	SCALE: NTS
SHEET 1 OF 1		