
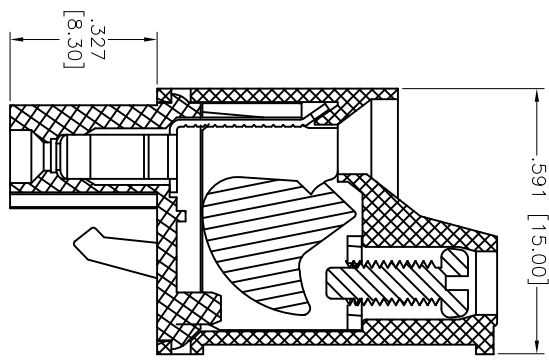
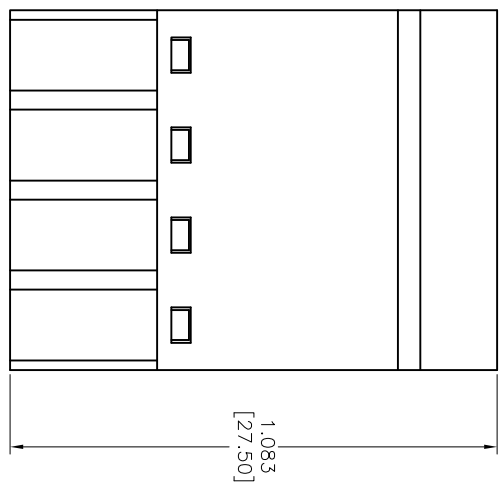



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/06/11	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

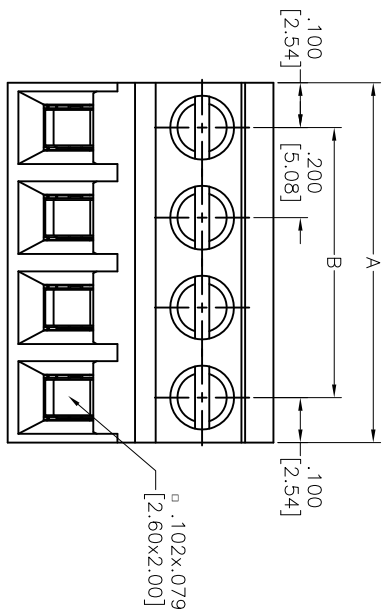

Positions: 2 thru 24  
 A = .200 [5.08] x No. of Positions  
 B = .200 [5.08] x No. of Spaces

	Tolerance
2-6P	±.008 [0.20]
7-12P	±.010 [0.25]
13-18P	±.012 [0.30]
19-24P	±.016 [0.40]

**SPECIFICATIONS:**

**Material:**  
 Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Clamp: Steel, Zn plated  
 Contact: Phosphor Bronze, Tin plated  
 Screw: Brass, M2.5/Zn plated

**Electrical:**  
 Operation voltage: 300 VAC  
 Current rating: 20 Amps  
 Withstanding Voltage: 1.6KV

**Mechanical:**  
 Wire range(mm<sup>2</sup>): 0.34-2.5  
 Solid wire (AWG): 12-22  
 Stranded wire (AWG): 12-22  
 Torque(lb-in): 3.5  
 Wire strip length(mm): 6-7

**Operating temperature:** -40°C to +115°C

**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE MM [INCHES]  
 TOLERANCES EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010

APPROVALS

DATE	DATE

DRAWN TW 10/06/11  
 CHECKED AY 10/06/11  
 APPROVED

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**EURO BLOCK, .200 [5.08] PITCH**

SIZE PART NO. REV.  
 X EBB-XX-D -

REF: S00007T SCALE: NTS SHEET 1 OF 1