
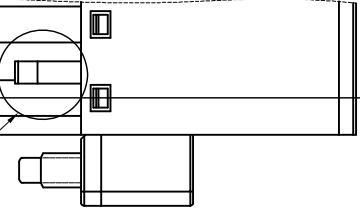
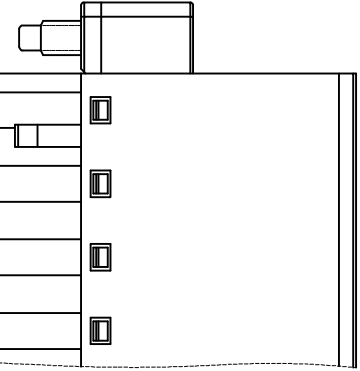
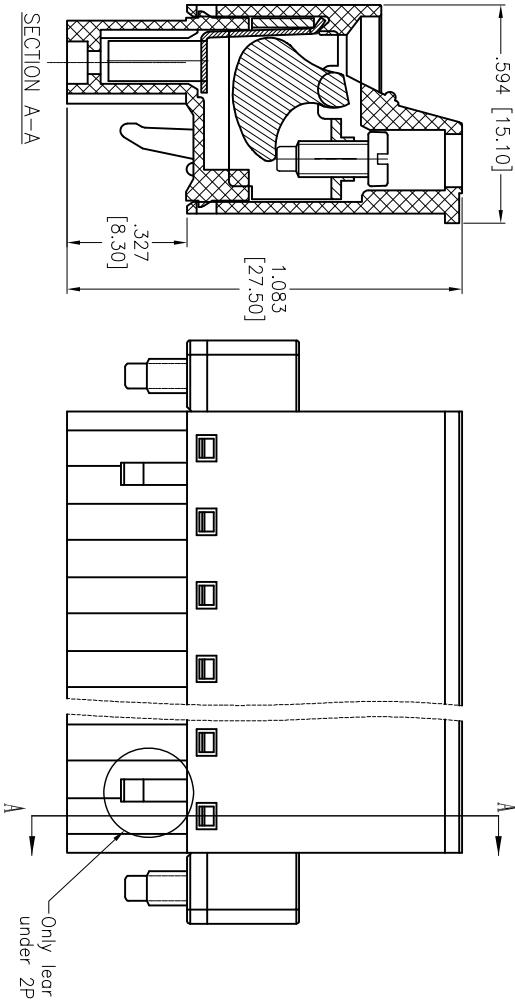


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/19/15	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

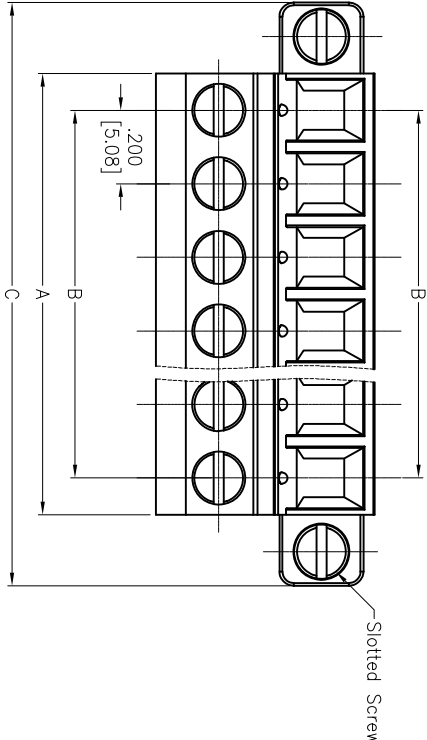

Positions: 02 thru 24  
 A = .200 [5.08] x No. of Positions  
 B = .200 [5.08] x No. of Spaces  
 C = .200 [5.08] x No. of (Positions+2)

**SPECIFICATIONS:**  
 Material: Insulator: PA66, rated UL 94V-0  
 Insulator color: Green  
 Screw: M2.5 Steel, Zinc plated  
 Clamp: Phosphor Bronze, Nickel plated  
 Cage: Steel, Zinc plated  
 Slide Block: Steel, Zinc plated

**Electrical:**  
 Voltage rated: 300 VAC  
 Current rated: 15 Amps  
 Contact resistance: 20 mΩ  
 Insulation resistance: 500 MΩ @ 500 VDC  
 Withstanding voltage: 2,000 VAC for 1 minute

**Mechanical:**  
 Wire range: 28-14AWG, 1.5mm<sup>2</sup>  
 Torque: 0.4N-m, 3.6lb-in  
 Strip length: 7-8mm

**Temperature Rating:**  
 Operating temperature: -40°C to +105°C

**Environmental:**  
 Lead free, RoHS compliant.

**UNLESS OTHERWISE SPECIFIED**  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**EURO TERMINAL BLOCK, .200 [5.08] PITCH WITH FLANGE**

DRAWN	AY	8/19/15	SIZE	PART NO.	REV.
CHECKED	KW	8/19/15	X	EB6A-XX-D-E-SS	-
APPROVALS		DATE	REF:	SCALE: NTS	SHEET 1 OF 1