Rev	AWO #	Description	Date	Appr
-		RELEASED	10/07/11	

APPROVED: _____

DATE: _____ TITLE: _____

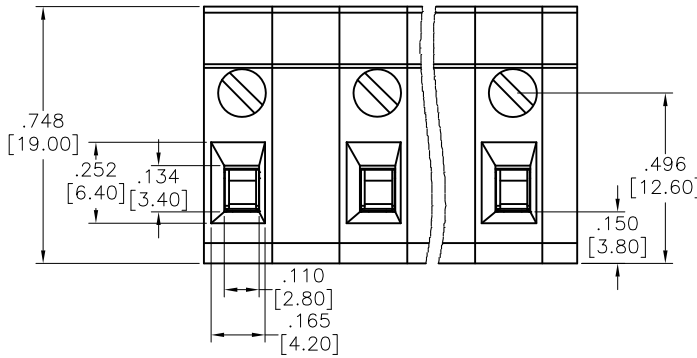

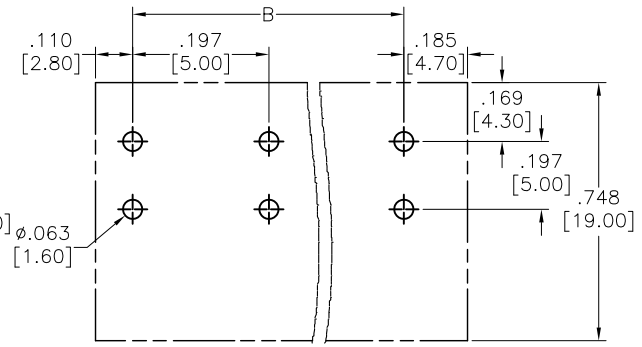

RECOMMENDED PCB LAYOUT

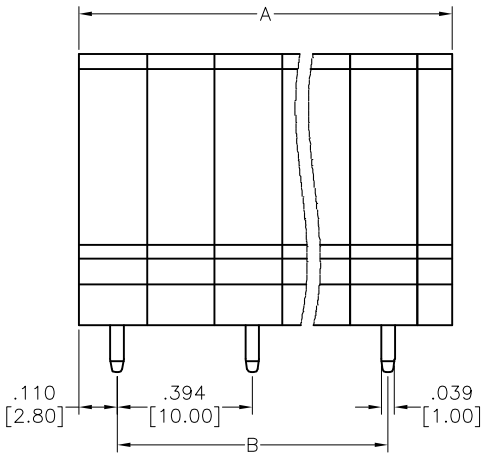

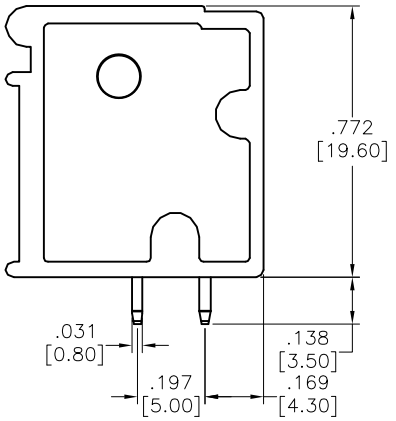

SPECIFICATIONS:

Material:
Insulator: Thermoplastic, rated UL 94V-0
Insulator color: Green
Contact: Brass, Tin plated
Screw: Brass, M2.5/Zn plated
Firm wire chunk: Steel, Zn plated
Electrical:
Operation voltage: 300 VAC
Current rating: 20 Amps
Withstanding Voltage: 1.6KV
Mechanical:
Solid wire (AWG): 12-22
Stranded wire (AWG): 12-22
Torque(Lb-In): 2.4
Wire strip length(mm): 10-11
Temperature Rating:
Operating temperature: -40°C to +115°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 250°C for 5 sec.

RoHS COMPLIANT

Positions: 2 thru 12
A= .394 [10.00] x No. of Positions - .098 [2.50]
B= .394 [10.00] x No. of Spaces

	Tolerance
2-4P	±.008 [0.20]
5-8P	±.012 [0.30]
9-12P	±.016 [0.40]

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	10/07/11
CHECKED	AY	10/07/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .394 [10.00] PITCH, VERTICAL

SIZE	PART NO.	REV.
X	EB7-XX-H	-

REF: S00007T | SCALE: NTS | SHEET 1 OF 1