
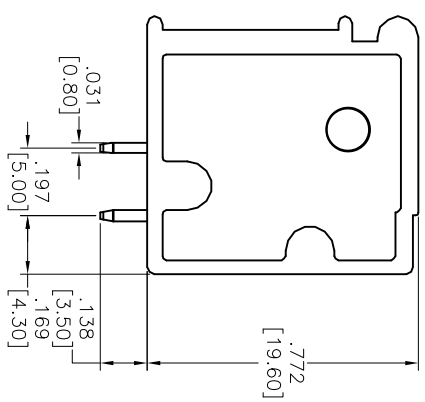
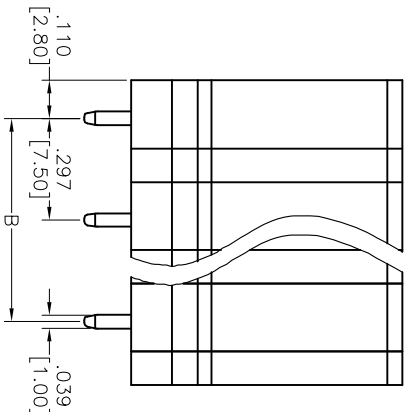


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/07/11	

APPROVED: _____

DATE: _____ TITLE: _____

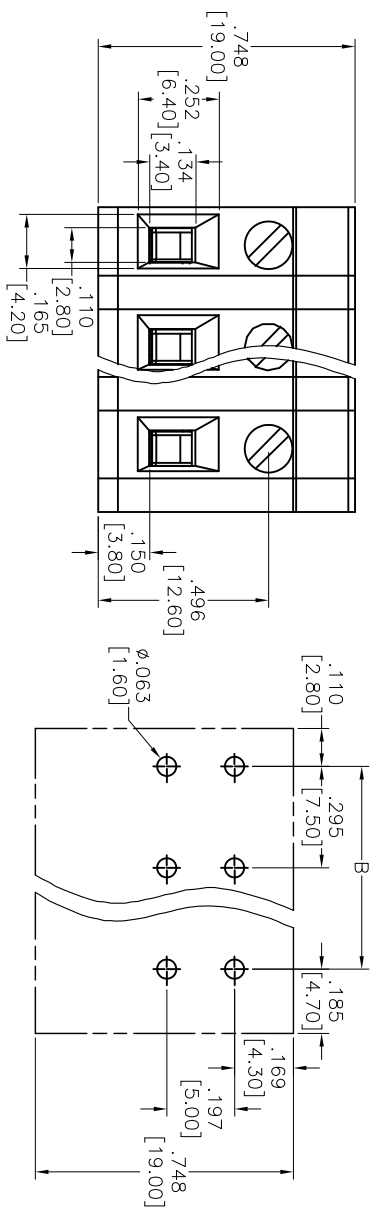

Positions: 2 thru 16
 A = .297 [7.50] x No. of Positions
 B = .297 [7.50] x No. of Spaces

Positions	Tolerance
2-4P	±.008 [0.20]
5-8P	±.012 [0.30]
9-12P	±.016 [0.40]

SPECIFICATIONS:

Material: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Firm wire chunk: Steel, Zn plated
 Contact: Brass, Tin plated
 Screw: Brass, M2.5/Zn plated
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 20 Amps
 Withstanding Voltage: 1.6KV
 Mechanical:
 Solid wire (AWG): 12-22
 Stranded wire (AWG): 12-22
 Torque(Lb-In): 2.4
 Wire strip length(mm): 10-11
 Temperature Rating:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, 297 [7.50] PITCH, VERTICAL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.XX ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN TW	10/07/11
CHECKED AY	10/07/11
APPROVED	

SIZE	PART NO.	REV.
X	EB7-XX-M	-
REF:	S00007T	SHEET 1 OF 1