



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/03/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

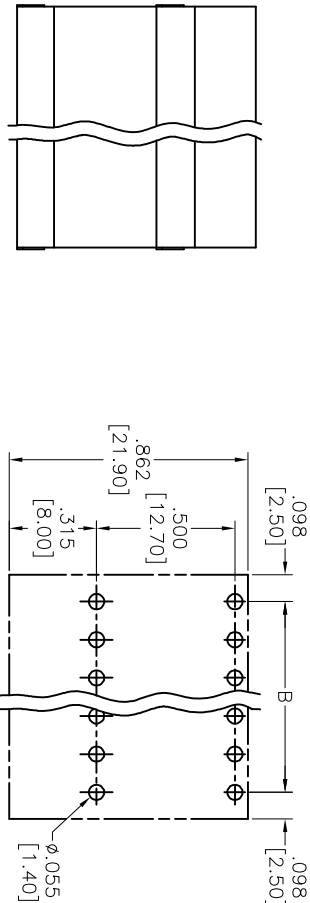

RECOMMENDED PCB LAYOUT

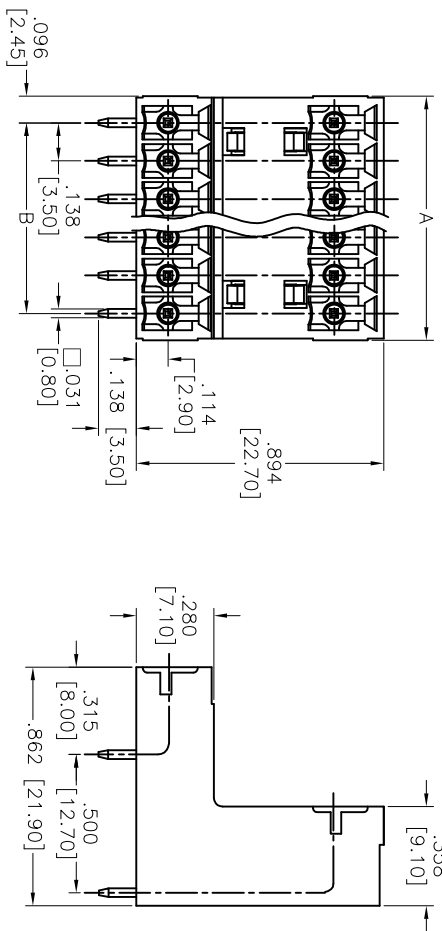

Positions: 4 thru 48  
 A = .138 [3.50] x No. of Spaces + .193 [4.90]  
 B = .138 [3.50] x No. of Spaces

Positions	Tolerance
4-10P	±.006 [0.15]
12-20P	±.008 [0.20]
22-30P	±.010 [0.25]
32-40P	±.012 [0.30]
42-48P	±.014 [0.35]

# ADAM TECH

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .138 [3.50] PITCH, RIGHT ANGLE

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Green  
 Contact: Brass, Tin plated  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 10 Amps  
 Withstanding Voltage: 1.6KV  
 Temperature Rating:  
 Operating temperature: -40°C to +115°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 250°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLES	
.X	±.10	ØX	±.10
.XX	±.020	ØXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS		DATE	
DRAWN	TW	11/03/11	
CHECKED	AY	11/03/11	
APPROVED			

SIZE	PART NO.	REV.
X	EB8-XX-A	-
REF:	S00007T	SCALE: NTS
SHEET 1 OF 1		