


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/07/11	

APPROVED: _____
 DATE: _____ TITLE: _____

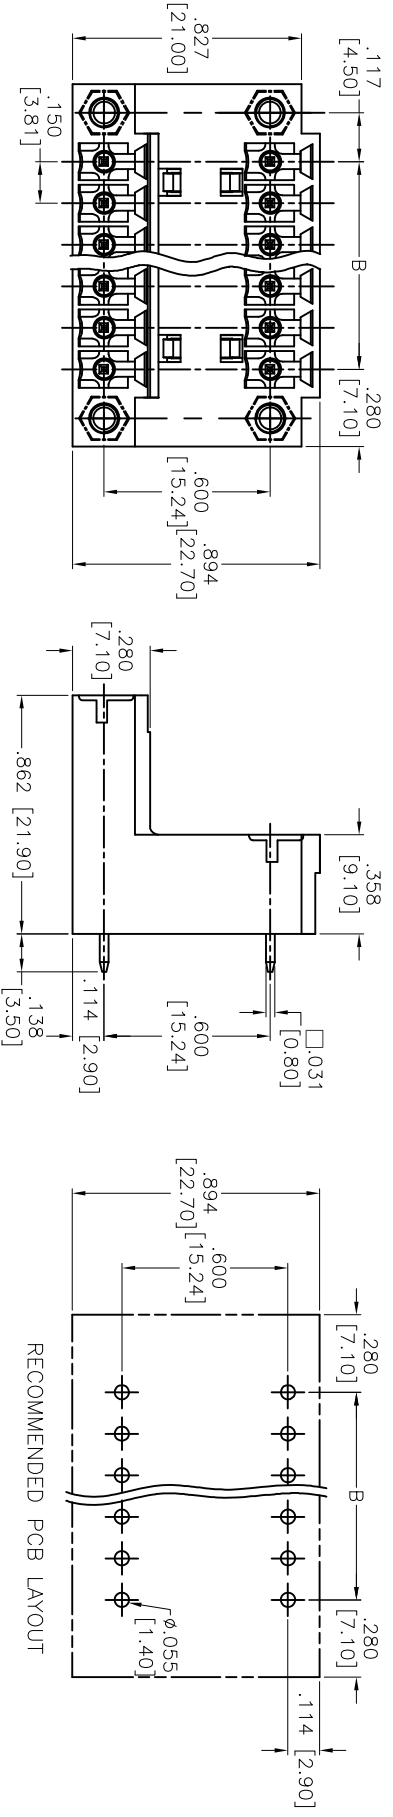

Positions: 4 thru 48
 A = .150 [3.81] x No. of Spaces + .559 [14.20]
 B = .150 [3.81] x No. of Spaces

Quantity	Tolerance
4-10P	±.006 [0.15]
12-20P	±.008 [0.20]
22-30P	±.010 [0.25]
32-40P	±.012 [0.30]
42-48P	±.014 [0.35]

SPECIFICATIONS:
 Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Copper Alloy, Tin plated
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 10 Amps
 Withstanding Voltage: 1.6KV
 Temperature Rating:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 250°C for 5 sec.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLDS
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN TW	11/07/11
CHECKED AY	11/07/11
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: EURO BLOCK, .150 [3.81] PITCH, VERTICAL WITH FLANGE

REF:	SIZE	PART NO.	SCALE:	SHEET	REV.
X	X	EB8-XX-B-VT-E	NIS	1 OF 1	-