Rev	AWO #	Description	Date	Appr
-		RELEASED	11/03/11	

APPROVED: _____

DATE: _____ TITLE: _____



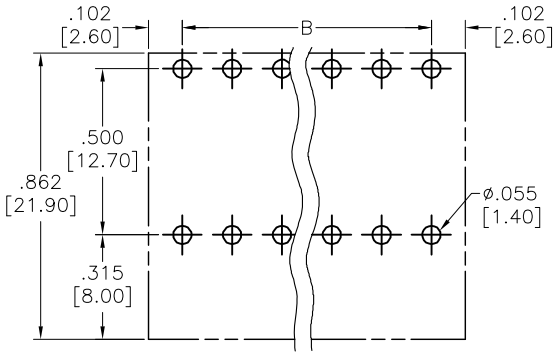

RECOMMENDED PCB LAYOUT

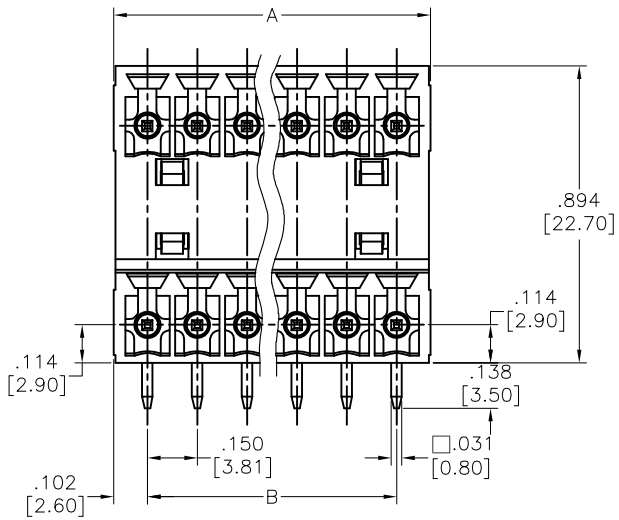

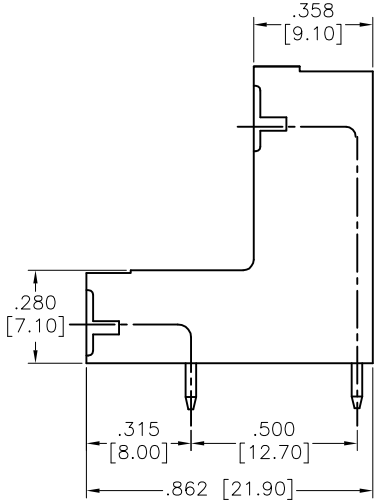

	Tolerance
4–10P	±.006 [0.15]
12–20P	±.008 [0.20]
22–30P	±.010 [0.25]
32–40P	±.012 [0.30]
42–48P	±.014 [0.35]

Positions: 4 thru 48
A= .150 [3.81] x No. of Spaces + .205 [5.20]
B= .150 [3.81] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Thermoplastic, rated UL 94V–0
Insulator color: Green
Contact: Brass, Tin plated
Electrical:
Operation voltage: 300 VAC
Current rating: 10 Amps
Withstanding Voltage: 1.6KV
Temperature Rating:
Operating temperature: –40°C to +115°C
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 250°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	11/03/11
CHECKED	AY	11/03/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
EURO BLOCK, .150 [3.81] PITCH, RIGHT ANGLE

SIZE	PART NO.	REV.
X	EB8-XX-B	-

REF:	SCALE:	SHEET
S00007T	NTS	1 OF 1