
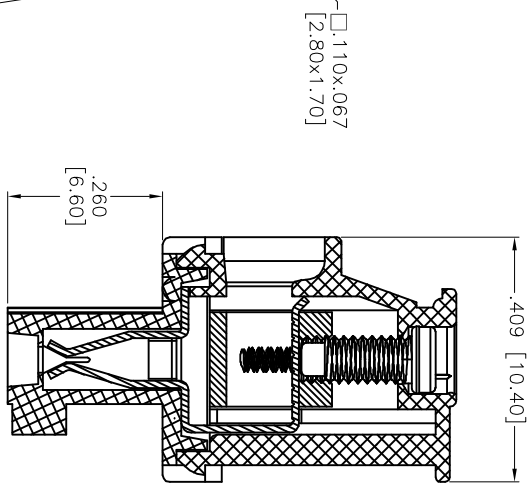
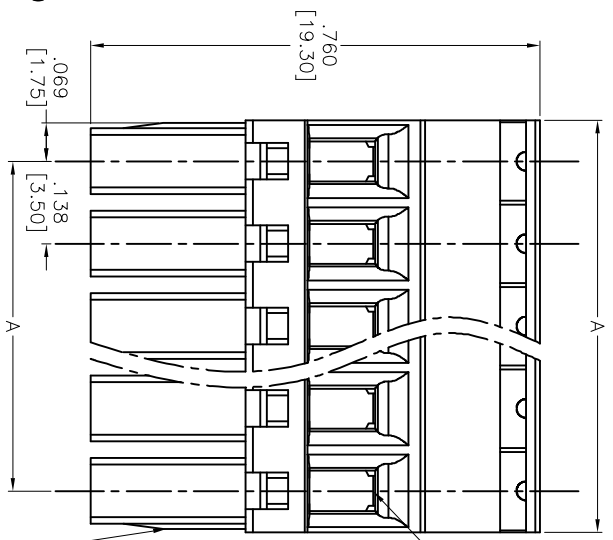


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/07/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

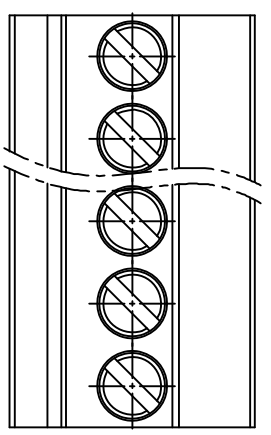

□.110x.067  
 [2.80x1.70]

.260 [6.60]

.409 [10.40]

2p to 6p with wedge, above 7p without wedge (including 7p)

Positions: 2 thru 24  
 A = .138 [3.50] x No. of Positions  
 B = .138 [3.50] x No. of Spaces

2-8P	±.004 [0.10]
9-16P	±.008 [0.20]
17-24P	±.012 [0.30]

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	±.10	ØXX	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXX	±.010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .138 [3.50] PITCH, BLACK

**SPECIFICATIONS:**  
 Material: Insulator: Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Clamp: Brass, Zn plated  
 Contact: Phosphor Bronze, Tin plated  
 Screw: Steel, M2/Zn plated  
 Electrical:  
 Operation voltage: 300 VAC  
 Current rating: 8 Amps  
 Withstanding Voltage: 1.6KV  
 Mechanical:  
 Wire range(mm<sup>2</sup>): 1.5  
 Solid wire(AWG): 16-28  
 Stranded wire(AWG): 16-28  
 Torque(Lb-In): 1.7  
 Wire strip length(mm): 6-7  
 Temperature Rating:  
 Operating temperature: -40°C to +115°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 250°C for 5 sec.



DRAWN	TW	11/07/11
CHECKED	AY	11/07/11
APPROVED		

SIZE	PART NO.	REV.
X	EB9-XX-A-R-BK	-
REF:	S00007T	SHEET 1 OF 1