
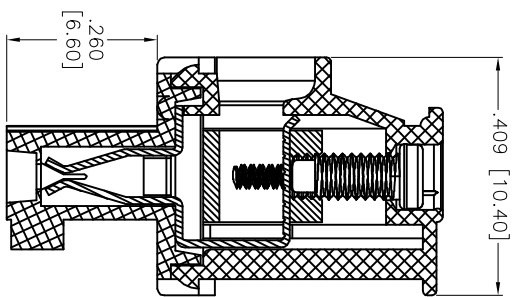
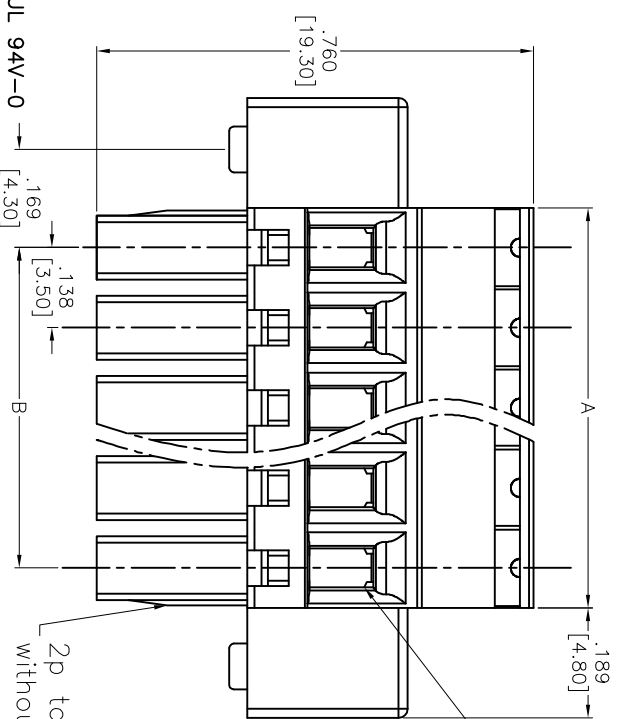


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/28/11	

APPROVED: _____
 DATE: _____ TITLE: _____

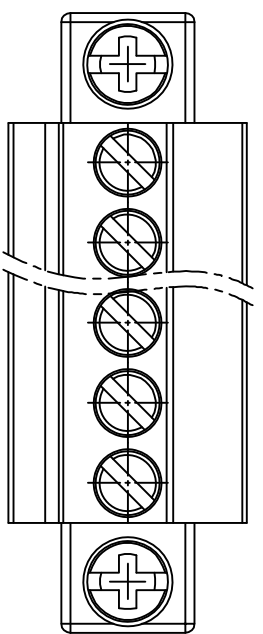

2p to 6p with wedge, above 7p
 without wedge (including 7p)

Positions: 2 thru 24
 A = .138 [3.50] x No. of Positions
 B = .138 [3.50] x No. of Spaces

Positions	Tolerance
2-8P	±.004 [0.10]
9-16P	±.008 [0.20]
17-24P	±.012 [0.30]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .138 [3.50] PITCH, BLACK WITH FLANGE

- SPECIFICATIONS:**
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Clamp: Brass, Zn plated
 Contact: Phosphor Bronze, Tin plated
 Screw: Steel, M2/Zn plated
 With flange Screw: Steel, M2.5/Zn plated
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 8 Amps
 Withstanding Voltage: 1.6KV
 Mechanical:
 Wire range(mm²): 1.5
 Solid wire(AWG): 16-28
 Stranded wire(AWG): 16-28
 Torque(Lb-In): 1.7
 Wire strip length(mm): 6-7
 Temperature Rating:
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ±.10	ØXX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXXX ±.010
APPROVALS	DATE
DRAWN TW	12/28/11
CHECKED AY	12/28/11
APPROVED	

SIZE	PART NO.	REV.
X	EB9-XX-A-R-E-BK	-
REF:	S00007T	
SCALE:	NVS	
SHEET	1 OF 1	

