
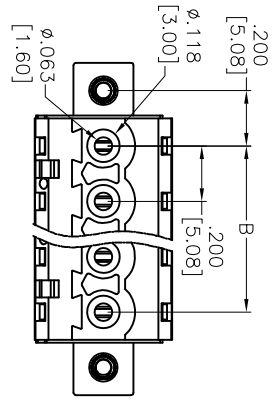
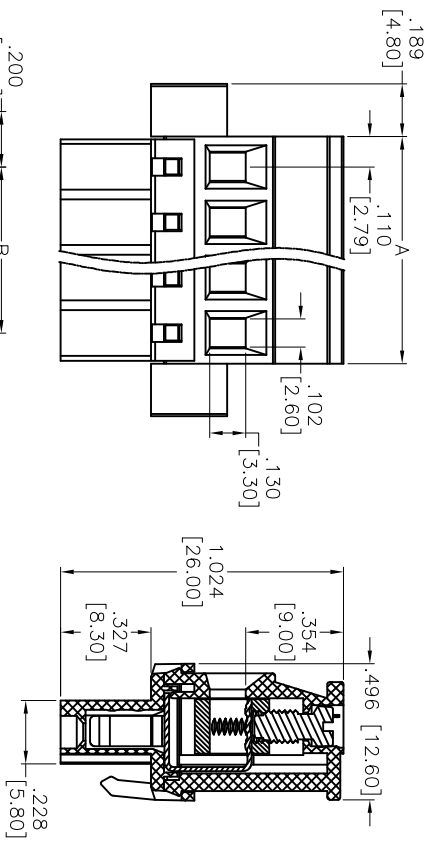


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/28/11	

APPROVED: _____ TITLE: _____
 DATE: _____

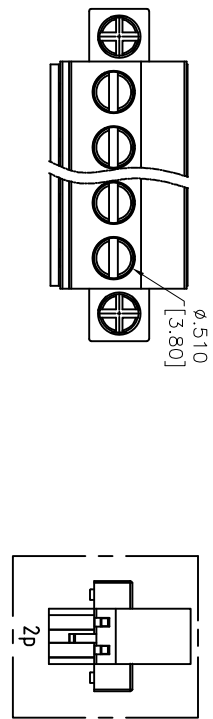

Positions: 2 thru 24
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

	Dim A	Dim B
2-6P	±.006 [0.15]	±.004* [0.10]
7-12P	±.010 [0.25]	±.006 [0.15]
13-18P	±.012 [0.30]	±.008 [0.20]
19-24P	±.016 [0.40]	±.012 [0.30]

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Clamp: Brass, Nickel plated
 Contact: Phosphor Bronze, Tin plated
 Screw: Steel, M3/Zn plated
 With flange screw: Steel, M2/Zn plated
Electrical:
 Operation voltage: 300 VAC
 Current rating: 15 Amps
 Withstanding Voltage: 1.6KV
Mechanical:
 Wire range(mm): 2.5
 Solid wire(AWG): 12-24
 Stranded wire(AWG): 12-24
 Torque(Lb-in): 3.5
 Wire strip length(mm): 6-7
 Temperature Rating:
 Operating temperature: -40°C to +115°C
Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES EXCEPT AS NOTED	
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN TW	12/28/11
CHECKED AY	12/28/11
APPROVED	

TITLE		PART NO.		REV.
EURO BLOCK, 200 [5.08] PITCH, BLACK, W/FLANGE		EB9-XX-D-R-E-BK		-
W/LATCHING HOOKS ON THE BACK SIDE				
REF:	S00007T	SCALE:	NIS	SHEET 1 OF 1