
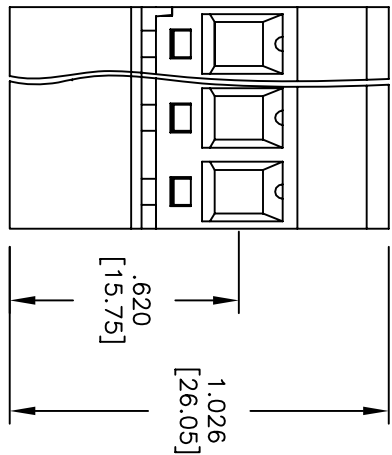
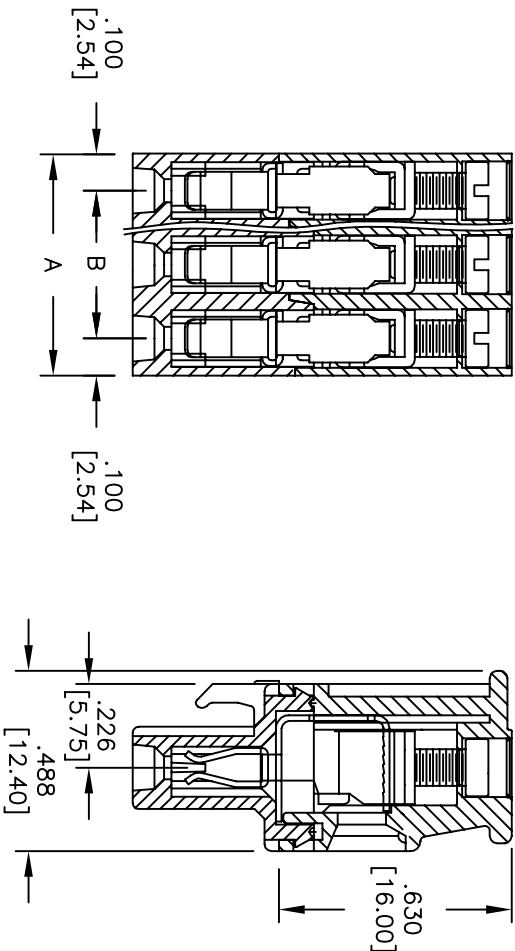


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/08	

APPROVED: _____

DATE: _____ TITLE: _____



SPECIFICATIONS:

Material: PA66, rated UL 94V-0
 Insulator color: Green
 Clamp: Bronze, Solder plated.
 Screw: Steel, M2.5/Zn plated.
 Wire cage: Steel, M2.5/Zn plated.
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 15 Amps max per Pole
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ DC500V
 Dielectric withstanding voltage: 4000 VAC for 1 minute
 Mechanical:
 Screw Torque: 4 Kgf-cm (max.)
 Wire Range: 12-28Awg.
 Environmental:
 Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Positions: 02 thru 24
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PLUGS FOR PLUGGABLE, STRAIGHT, REVERSED BODY, .200" [5.08] PITCH, SLOTTED SCREW

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	9/10/08
CHECKED	
APPROVED	

SIZE X	PART NO. EB9-XX-D-R-SL	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1



6 5 4 3 2 1