
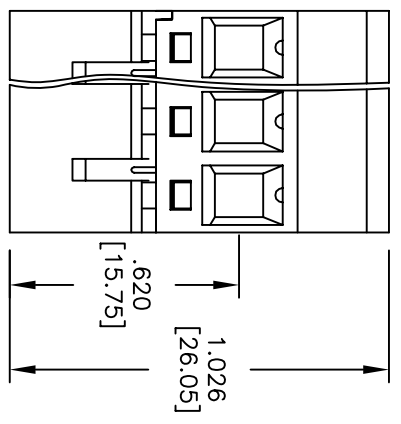
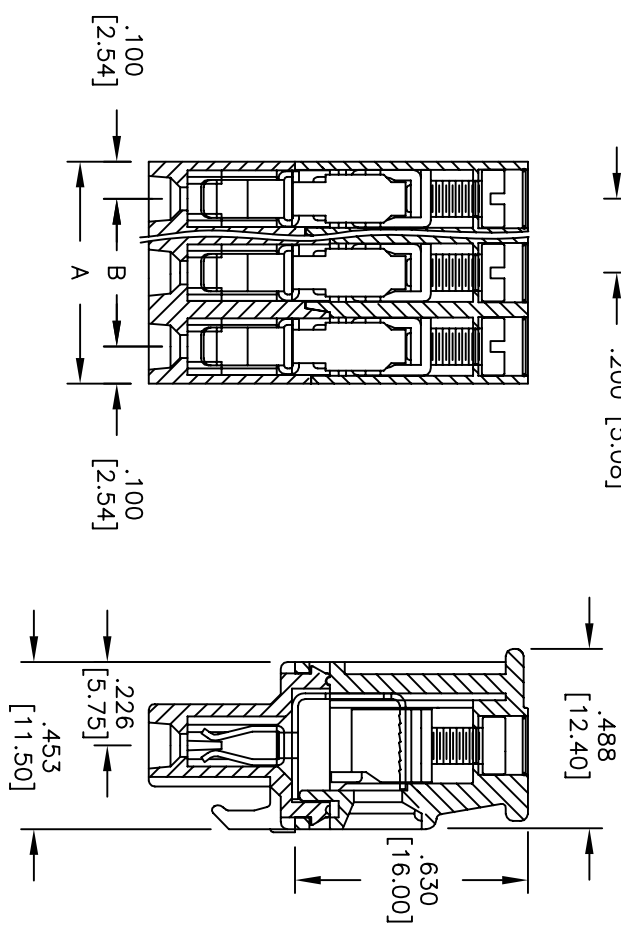


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/08	

APPROVED: _____

DATE: _____ TITLE: _____

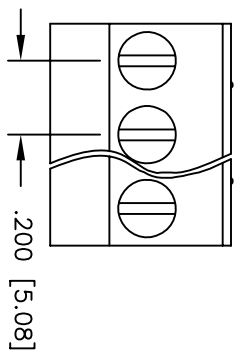

SPECIFICATIONS:

- Material: PA66, rated UL 94V-0
- Insulator color: Green
- Clamp: Bronze, solder plated.
- Screw: Steel, M2.5/Zn plated.
- Wire cage: Steel, M2.5/Zn plated.
- Electrical:
 - Operation voltage: 300 VAC max
 - Current rating: 15 Amps max per Pole
 - Contact resistance: 20 mohms max
 - Insulation resistance: 500 Mohms min @ DC500V
 - Dielectric withstanding voltage: 4000 VAC for 1 minute
- Mechanical:
 - Screw Torque: 4 Kgf-cm (max.)
 - Wire Range: 12-28AWG.
- Environmental:
 - Operating temperature: -40°C to +105°C
 - Lead free, RoHS compliant.
 - Recommended soldering temp: 235°C for 5 sec.

Positions: 02 thru 24
 A = .200 [5.08] x No. of Positions
 B = .200 [5.08] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **TERMINAL BLOCK, PLUGS FOR PLUGGABLE, STRAIGHT, .200" [5.08] PITCH, SLOTTED SCREW**



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM [INCHES]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	9/10/08
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	EB9-XX-D-SL	-
REF:	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1