

6

5

4

3





2

1


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/11	

APPROVED: _____

DATE: _____ TITLE: _____

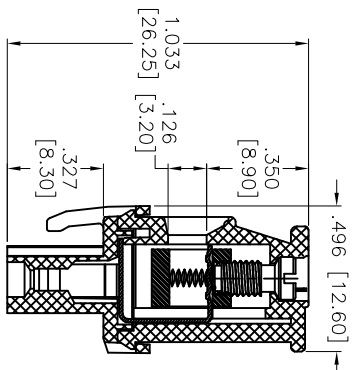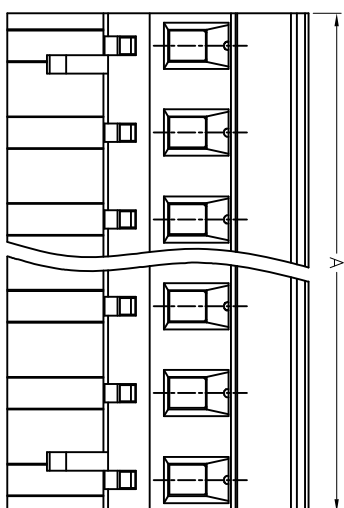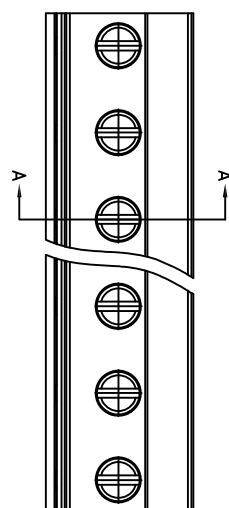

SECTION A-A

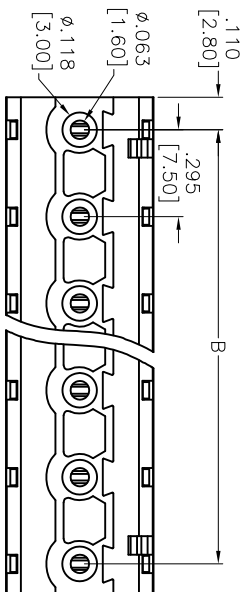

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Black
- Clamp: Brass, Nickel plated
- Contact: Phosphor Bronze, Tin plated
- Screw: Steel, M3/Zn plated
- Electrical:
 - Operation voltage: 300 VAC
 - Current rating: 15 Amps
 - Withstanding Voltage: 1.6KV
- Mechanical:
 - Wire range(mm²): 0.2~2.5
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
 - Torque(lb-in): 3.5
 - Wire strip length(mm): 6-7
 - Temperature Rating: Operating temperature: -40°C to +115°C

Positions: 2 thru 16
 A = .295 [7.50] x No. of Spaces + .200 [5.60]
 B = .295 [7.50] x No. of Spaces

	Tolerance
2-6P	±.008 [0.20]
7-11P	±.012 [0.30]
12-16P	±.016 [0.40]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .295 [7.50] PITCH, BLACK HOOKS ON ENTRY SIDE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN TW	11/25/11
CHECKED AY	11/25/11
APPROVED	

TITLE		SIZE	PART NO.	REV.
EURO BLOCK, .295 [7.50] PITCH, BLACK HOOKS ON ENTRY SIDE		X	EB9-XX-M-BK	
REF:	S00007T	SCALE:	NTS	SHEET 1 OF 1



6

5

4

3

2

1