
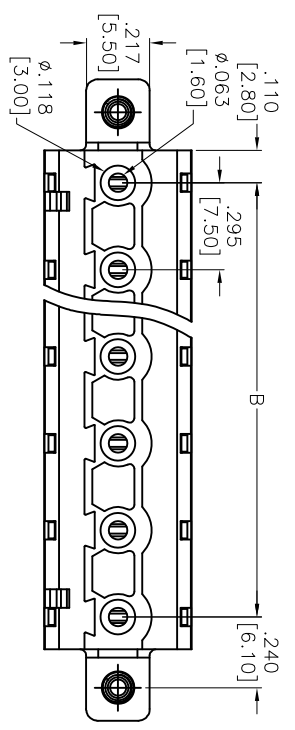
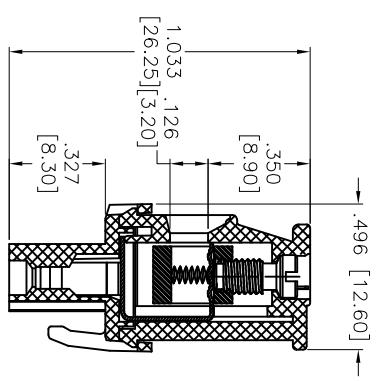
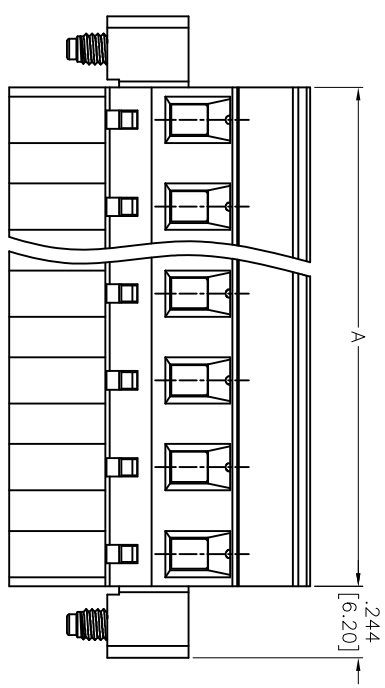



Rev	AWO #	Description	Date	Appr
-		RELEASED	11/25/11	

APPROVED: _____ TITLE: _____
 DATE: _____

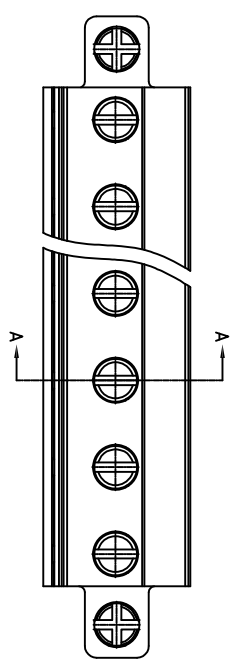

SPECIFICATIONS:

- Material: Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Black
- Clamp: Brass, Nickel plated
- Contact: Phosphor Bronze, Tin plated
- Screw: Steel, M3/Zn plated
- With Flange Screw: Steel, M2.5/Zn plated
- Electrical: Operation voltage: 300 VAC
- Current rating: 15 Amps
- Withstanding Voltage: 1.6KV
- Mechanical: Wire range(mm²): 0.2~2.5
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque(lb-in): 3.5
- Wire strip length(mm): 6-7
- Temperature Rating: Operating temperature: -40°C to +115°C

Positions: 2 thru 16
 A = .295 [7.50] x No. of Spaces + .200 [5.60]
 B = .295 [7.50] x No. of Spaces

	Tolerance
2-6P	±.008 [0.20]
7-11P	±.012 [0.30]
12-16P	±.016 [0.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .X ±.10 ØXX ±.015
 .XX ±.020 ØXXX ±.010
 .XXX ±.015

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN		TW	11/25/11	TITLE		EURO BLOCK, 295 [7.50] PITCH, BLACK
CHECKED		AY	11/25/11	PART NO.		EB9-XX-M-R-E-BK
APPROVED				SIZE	X	REV.
APPROVALS				REF:	S00007T	
SCALE:		NTS		SHEET		1 OF 1



6 5 4 3 2 1