
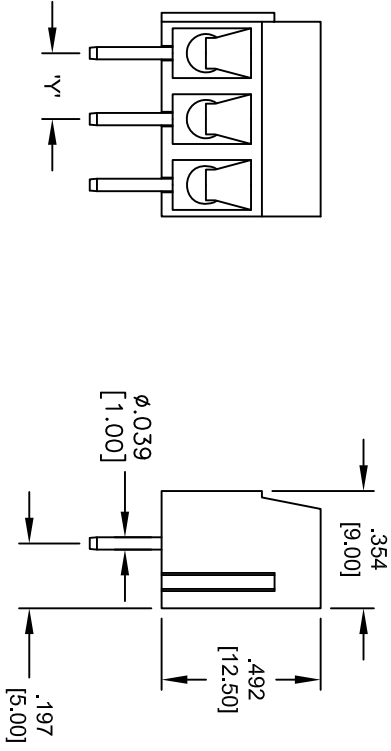


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/3/04	

APPROVED: _____
 DATE: _____ TITLE: _____



REPLACE 'Y' WITH PITCH
 C = .197 [5.00] E = .276 [7.00] H = .394 [10.00] K = .591 [15.00]

SPECIFICATIONS:
 Material: Nylon, rated UL 94V-0
 Insulator color: Black
 Electrical:
 Operation voltage: 300V AC
 Current rating: 10 Amps max per Pole
 Contact resistance: 20 mohms max.
 Insulation resistance: 5000 Mohms min @ 1000V
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Mechanical:
 Wire range: 14-22 Awg
 Torque: 4 Kg.cm (max.)
 Environmental:
 Operating temperature: -55°C to +105°C
 Lead free, RoHS Compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SLS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **EURO BLOCK, STRAIGHT MULTIPLE PITCHES**

SIZE: X PART NO.: **EBA-XX-X**

REF: SCALE: NTS SHEET 1 OF 1