
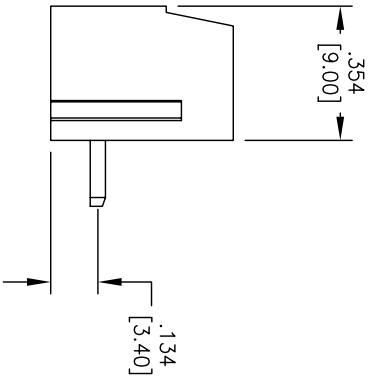
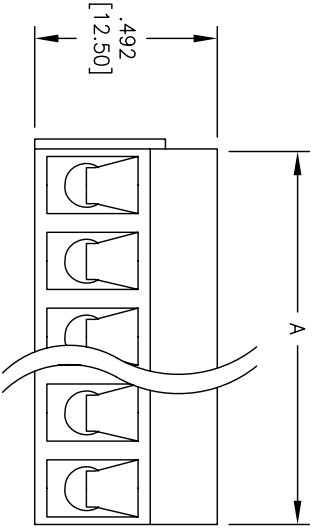


Rev	W/O #	Description	Date	Appr
-		Released	3/30/06	

APPROVED: _____ TITLE: _____
 DATE: _____

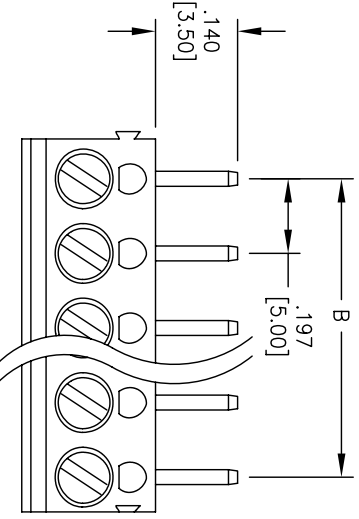

A = .197 [5.00] X No. of Positions
 B = .197 [5.00] X No. of Spaces

SPECIFICATIONS:

- Material: Insulator: PBT, glass reinforced, rated UL 94V-0
- Insulator color: Black
- Metal cage: Brass, tin plated
- Screw: Steel galvanized or chromatinized
- Wire guard: Stainless Steel, tin plated
- Electrical:
 - Operating voltage: 250 VAC max.
 - Current rating: 7 Amp max
 - Contact resistance: 20 mohms max. initial
 - Insulation resistance: 5000 Mohms. min
 - Dielectric withstanding voltage: 1500 V AC for 1 minute
- Mechanical:
 - Recommended wire size: 14 to 22 Awg
- Environmental:
 - Lead free, RoHS compliant
 - Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
.X	±.10
.XX	±.020
.XXX	±.015
ØXX	±.10
ØXXX	±.015
ØXXXX	±.010
APPROVALS	DATE
DRAWN	LFJ
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: EURO BLOCK, .354 HEIGHT RIGHT
 ANGLE, 5.00mm PITCH

SIZE	PART NO.	REV.
X	EBD-XX-C	-

REF: SCALE: NTS SHEET 1 OF 1