

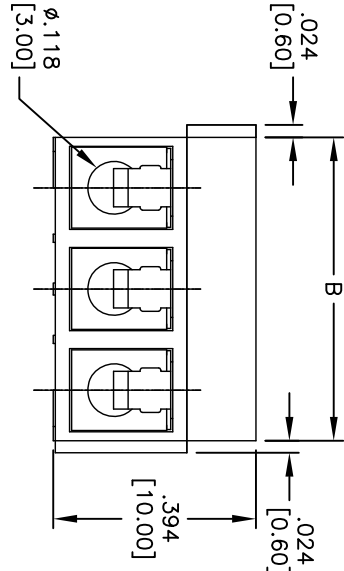


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/14/11	

APPROVED: _____
 DATE: _____ TITLE: _____

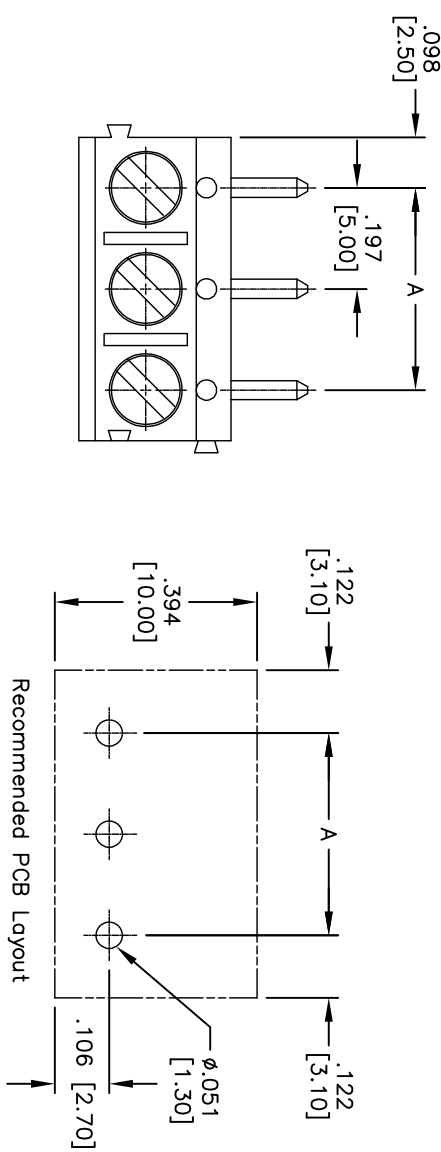

Positions	Dim C	Dim A&B
2-6P	±.006 [0.15]	±.008 [0.20]
7-12P	±.008 [0.20]	±.010 [0.25]
13-18P	±.010 [0.25]	±.012 [0.30]
19-24P	±.012 [0.30]	±.016 [0.40]

Positions: 2 thru 24
 A = .197 [5.00] x No. of Spaces
 B = .197 [5.00] x No. of Positions

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, .197 [5.00] PITCH
 COLOR: BLACK

SIZE	PART NO.	REV.
X	EBE-XX-C	
SCALE: NTS	SHEET 1 OF 1	

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ±.10	±.10
.XX ±.020	±.015
.XXX ±.015	±.010

DRAWN	AY	6/14/11
CHECKED	AH	6/14/11
APPROVED		

SPECIFICATIONS:

Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contact: Brass, Tin plated
 Wire guard: Stainless Steel
 Electrical:
 Operation voltage: 250 VAC
 Current rating: 16 Amps
 Solid wire (AWG): 14-22
 Stranded wire (AWG): 14-22
 Withstanding Voltage: 1.5KV
 Wire strip length: 5-6mm
 Environmental:
 Operating temperature: -40°C to +115°C
 Lead free, RoHS compliant.

