
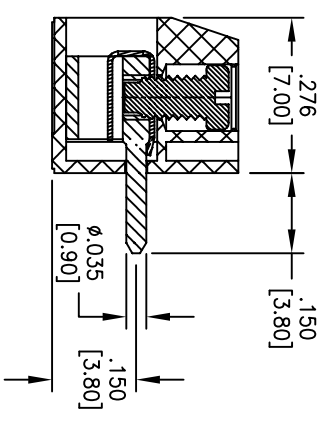
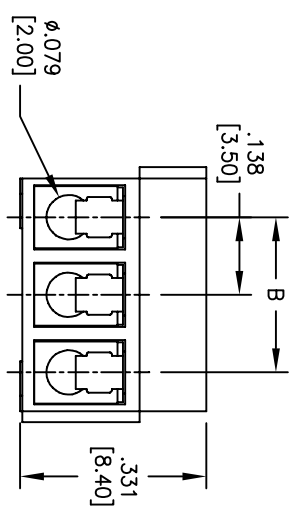
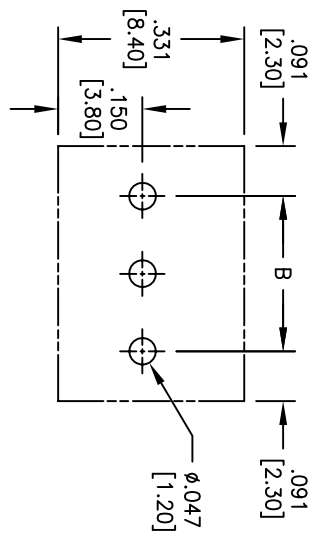


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	WVO #	Description	Date	Appr
-		RELEASED	3/30/06	
A		REDRAWN	8/22/13	AV/NP

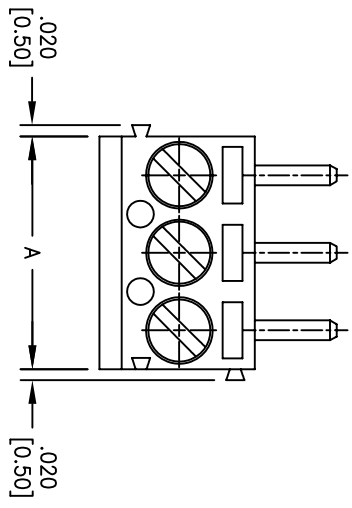

Positions: 02 thru 24
 A = .138 [3.50] x No. of Positions
 B = .138 [3.50] x No. of Spaces

	DIM A	DIM B
2-6P	±.008 [0.20]	±.008 [0.15]
7-12P	±.010 [0.25]	±.008 [0.20]
13-18P	±.012 [0.30]	±.010 [0.25]
19-24P	±.016 [0.40]	±.012 [0.30]

SPECIFICATIONS:

- Material:** Insulator: Thermoplastic, rated UL 94V-0
- Insulator color: Green
- Wire guard: Stainless Steel
- Contact: Brass, Tin plated
- Screw: Steel, M2/Yellow Chromated Zinc
- Electrical:** Operation voltage: 125 VAC
- Current rating: 10 Amps
- Withstanding Voltage: 1.25KV
- Mechanical:** Solid wire(AWG): 16-26
- Stranded wire(AWG): 16-26
- Torque(Lb-In): 1.7
- Wire strip length(mm): 5-6
- Temperature Rating: Operating temperature: -40°C to +115°C
- Environmental:** Lead free, RoHS compliant.



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES. [MM]	
TOLERANCES: EXCEPT AS NOTED	
X .10	ØX
.XX ±.020	ØXX
.XXX ±.015	ØXXX
APPROVALS	DATE
DRAWN	2/09/07
CHECKED	
APPROVED	

TITLE	EURO BLOCK, RIGHT ANGLE, 3.50MM PITCH
SIZE	PART NO.
X	EBF-XX-A
REF:	S00007T
SCALE:	NIS
SHEET	1 OF 1