
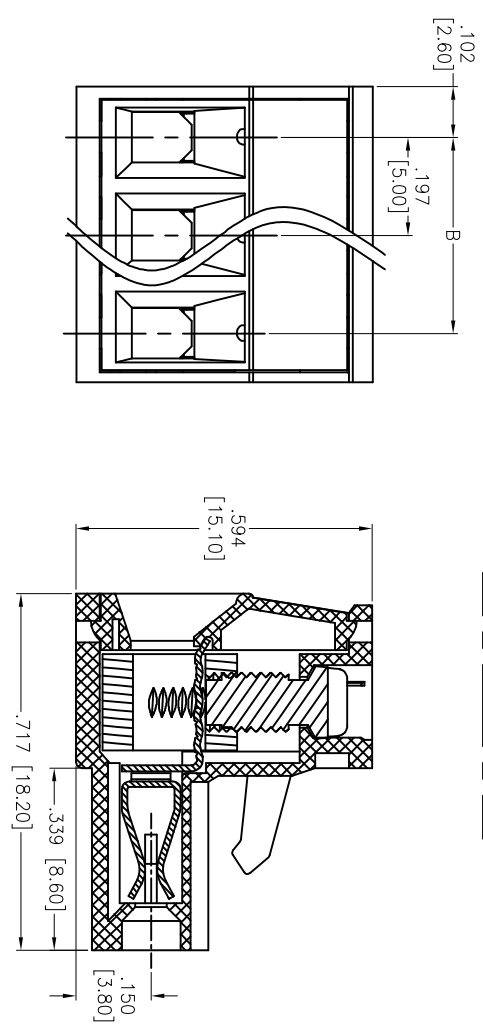


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/30/04	
A		REDRAWN	10/26/11	

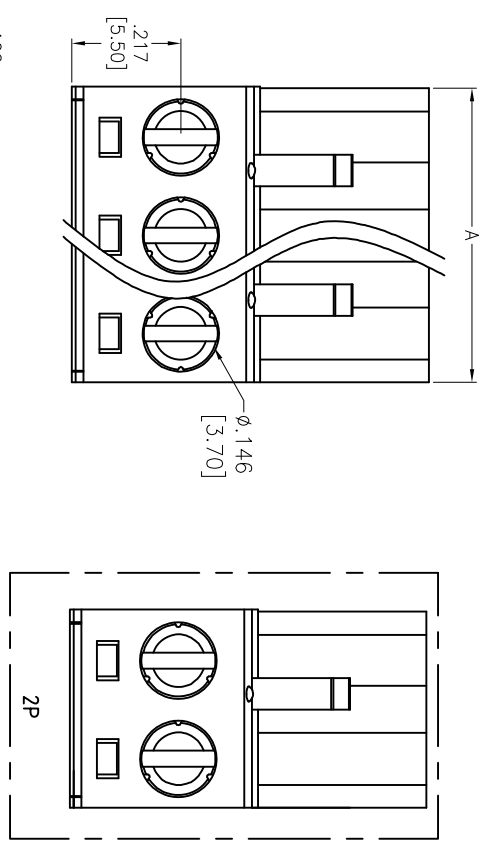

Positions: 2 thru 24
 A = .197 [5.00] x No. of Positions
 B = .197 [5.00] x No. of Spaces

	Tolerance
2-6P	±.006 [0.15]
7-12P	±.008 [0.20]
13-18P	±.012 [0.30]
19-24P	±.016 [0.40]

SPECIFICATIONS:

Material:
 Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Clamp: Brass, Nickel plated
 Contact: Phosphor Bronze, Tin plated
 Screw: Steel, M3/Zn Plated

Electrical:
 Operation voltage: 300 VAC
 Current rating: 20 Amps
 Withstanding Voltage: 1.6KV

Mechanical:
 Wire range (mm²): 2.5
 Solid wire (AWG): 12-24
 Stranded wire (AWG): 12-24
 Torque(Lb-In): 5
 Wire strip length (mm): 7-8
 Operating temperature: -40°C to +115°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010

APPROVALS	DATE

DRAWN	SLS	DATE
		3/30/04

CHECKED	

APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, VERTICAL, .197 [5.00] PITCH

SIZE	PART NO.	REV.
X	EBH-XX-C	A

REF: S00007T SCALE: NTS SHEET 1 OF 1