
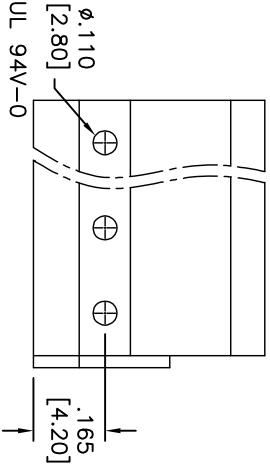
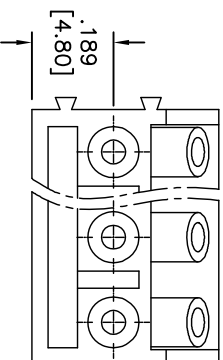
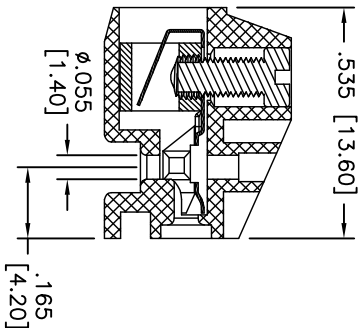
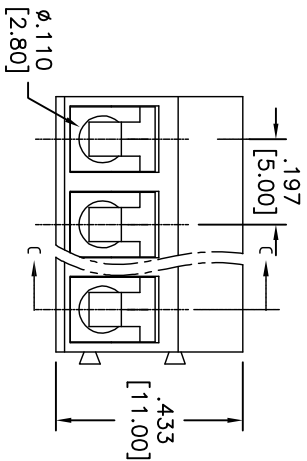


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/06/07	
A		REDRAWN	7/12/10	
B		REDRAWN	8/22/13	AV/SC

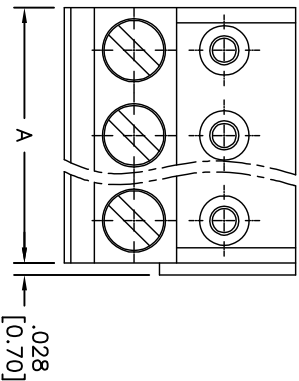

	Dim A	Dim B
2-6P	±.006 (0.151)	±.004 (0.101)
7-12P	±.010 (0.251)	±.006 (0.151)
13-18P	±.012 (0.301)	±.008 (0.201)
19-24P	±.016 (0.401)	±.012 (0.301)

Positions: 02 thru 24
 A = .197 [5.00] X No. of Positions
 B = .197 [5.00] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Thermoplastic, rated UL 94V-0
 Insulator color: Green
 Contact: Phosphor Bronze, Tin plated.
 Screw: Steel, M2.6/Zn plated.
Electrical:
 Operation voltage: 300 VAC max
 Current rating: 15 Amps
 Torque (Lb-in): 3.5
 Wire range: 0.34-1.5mm²
 Solid wire (AWG): 14-22
 Stranded wire (AWG): 14-22
 Withstanding Voltage: 1.6KV
 Wire strip length: 5-6mm



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, HEADER, .197 [5.00mm]

SIZE	PART NO.	REV.
X	EBU-XX-C	B
REF: S0007T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1