

6

5

4





3

2

1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/14	
A		UPDATE SHAPE	10/27/14	AY/NP

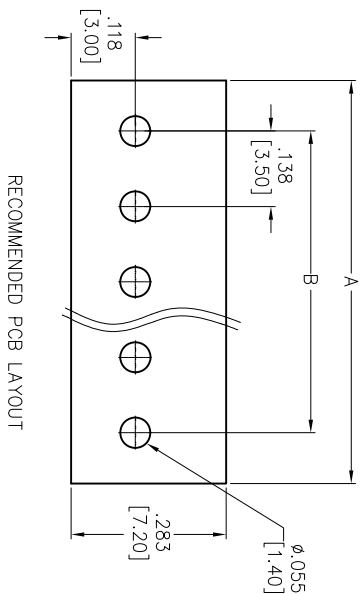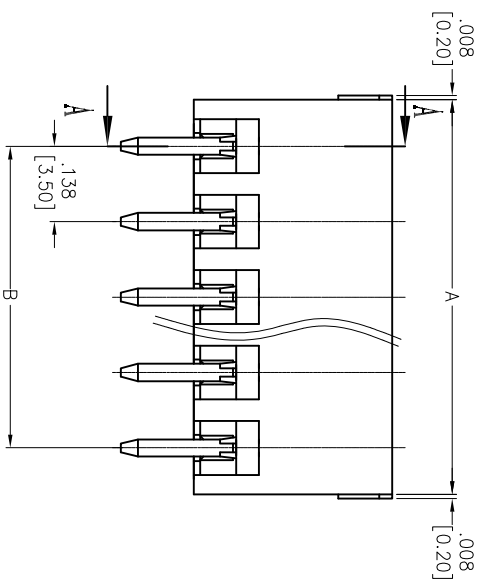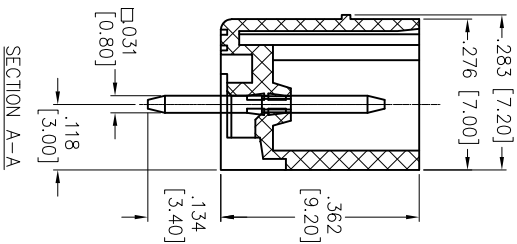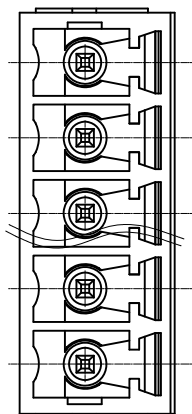

Positions: .02 thru 24
 A = .138 [3.50] x No. of Spoces + .169 [4.30]
 B = .138 [3.50] x No. of Spoces

SPECIFICATIONS:
 Material:
 Insulator: PA66, rated UL 94V-0
 Insulator color: Green
 Contact: Brass, Tin plated
 Electrical:
 Operation voltage: 300 VAC max
 Current rating: 8 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2,000 VAC for 1 minute
 Environmental:
 Operating temperature: -40°C to +105°C
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	AY	6/13/14	
CHECKED			
APPROVED			

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, STRAIGHT, .138" [3.50] PITCH

SIZE	PART NO.	REV.
X	EBRA-XX-A	A
REF: S00067C	SCALE: NTS	SHEET 1 OF 1

A

B

C

D

A

B

C

D

6

5

4

3

2

1