


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/07	

APPROVED: _____
 DATE: _____ TITLE: _____

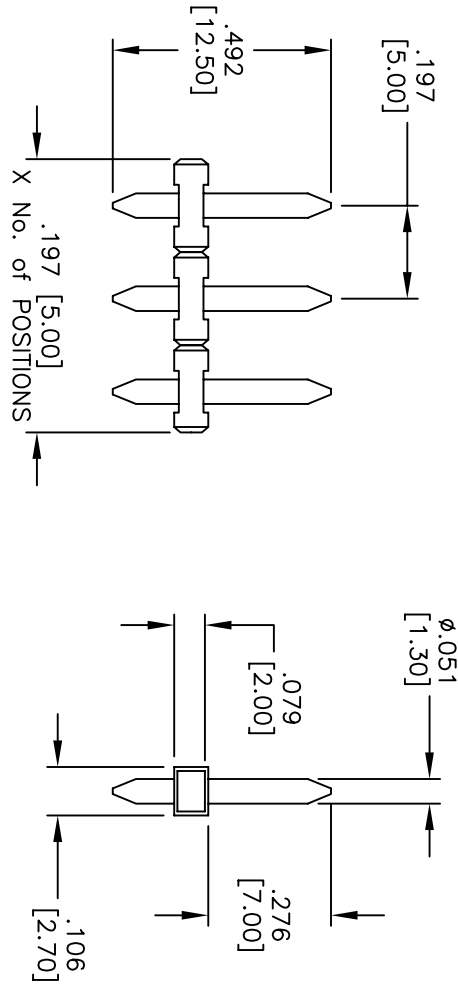

2 thru 24 Poles Available

SPECIFICATIONS:
 Material: Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Pins: Brass, Nickel or Tin pated
 Electrical:
 Operation voltage: 300V max
 Current rating: 10 Amps max per Pole
 Insulation resistance: 5000 Mohms min @ 1000V
 Dielectric withstanding voltage: 1600 VAC for 1 minute
 Environmental:
 Operating temperature: -30°C to +105°C
 Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
**PLUGGABLE HEADER, 5.00mm
 2 THRU 24 PINS**

SIZE	PART NO.	REV.
X	EBT-XX-C	-
REF:	SCALE: NTS	SHEET 1 OF 1