

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/08/10	

6

5

4






3

2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

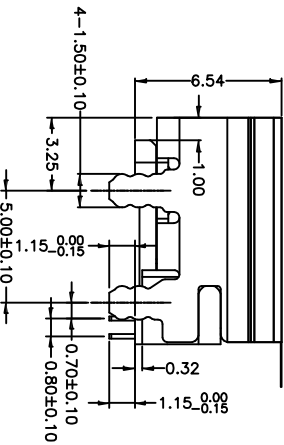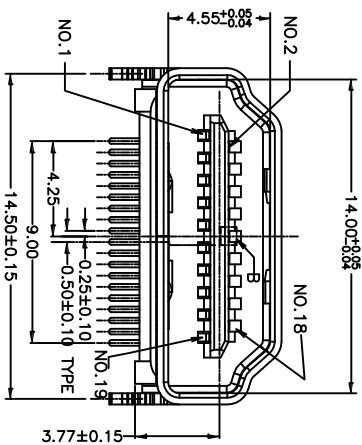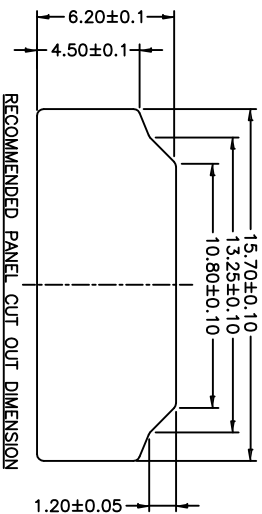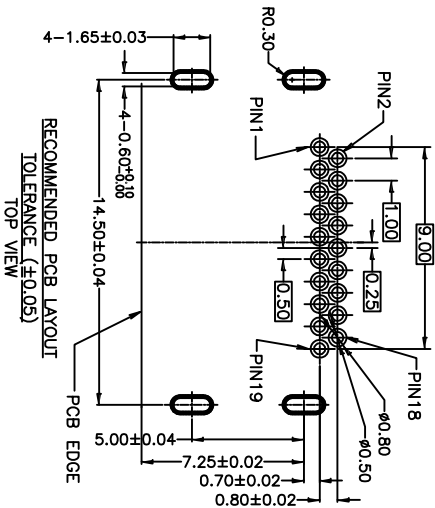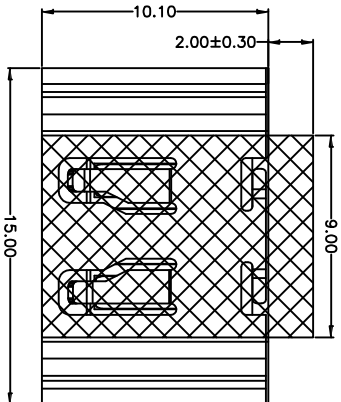

**SPECIFICATIONS:**

**Material:** Housing: Hi-temp thermoplastic, UL 94V-0  
 Housing color: Black  
 Contact: Copper Alloy  
 Shield: Copper Alloy, Nickel plated  
**Plating:**  
 3u" Gold over Nickel underplate on contact area,  
 Tin over Copper underplate on tails.  
**Electrical:**  
 Voltage rating: 40V  
 Current rating: 0.5A  
 Dielectric strength: 300VAC for 1 minute min.  
 Contact resistance: 100 Megohm min.  
 Insulation resistance: 10 mohms max.  
**Environmental:**  
 Lead free, RoHS Compliant  
 Recommended soldering temp: 260°C for 5 seconds.

PACKAGED ON TAPE & REEL

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE  
 DIP TYPE, 2 ROWS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	6/08/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	HDMI-S-RA-1-RF-03-KT-T/R	
REF:	S00015C	
SCALE:	NTS	
SHEET	1 OF 1	

A

B

C

D

6

5

4

3

2

1

