Rev	AWO #	Description	Date	Appr
-		RELEASED	12/7/15	

APPROVED: _____

DATE: _____ TITLE: _____

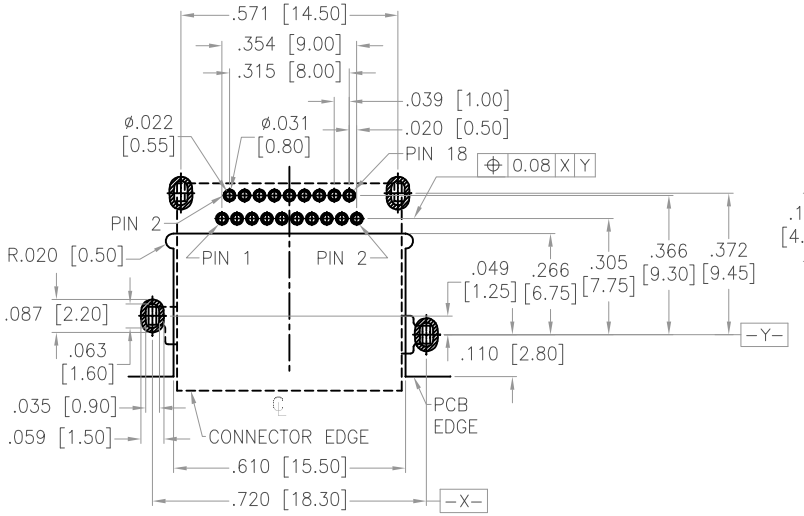

RECOMMENDED PCB LAYOUT

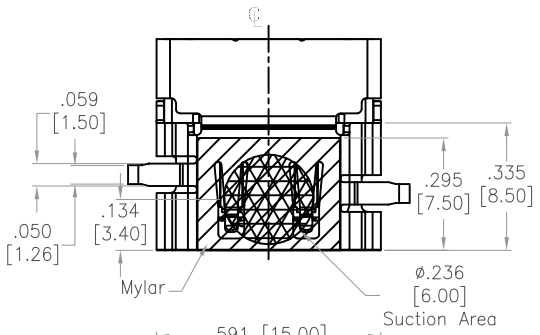

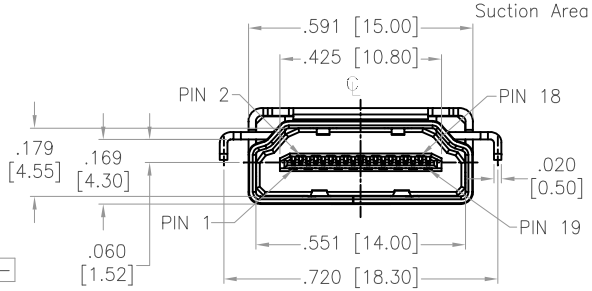

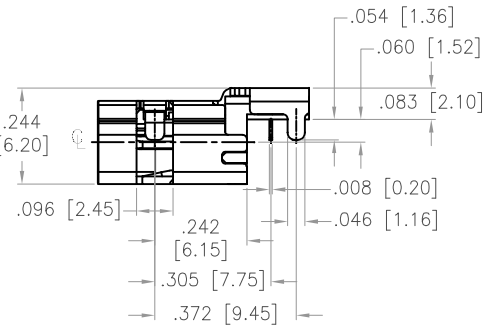

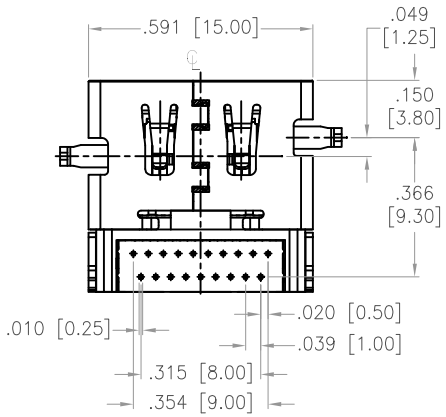

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
Material:
Housing: Hi-temp thermoplastic, UL 94V-0
Housing color: Black
Contact: Brass
Shield: Steel, Nickel plated
Plating:
Gold flash over Nickel underplate overall
Electrical:
Voltage rating: 40V
Current rating: 0.5A
Dielectric strength: 500VAC for 1 minute min.
Insulation resistance: 100 Megohm min.
Contact resistance: 10 mohms max.
Temperature Rating:
Operating temperature: -20°C to +85°C
Environmental:
Lead free, RoHS Compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	HR	12/7/15
CHECKED	TW	12/7/15
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
HDMI CONNECTOR, RIGHT ANGLE
DIP ASSEMBLY, W/ MYLAR, TAPE & REEL

SIZE	PART NO.	REV.
X	HDMI-S-RA-1-RF-04-KT-T/R	-

REF: S00101C | SCALE: NTS | SHEET 1 OF 1