

6

5

4




3

2


1

APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/12	
A		UPDATE SHAPE	7/15/14	AV/NP

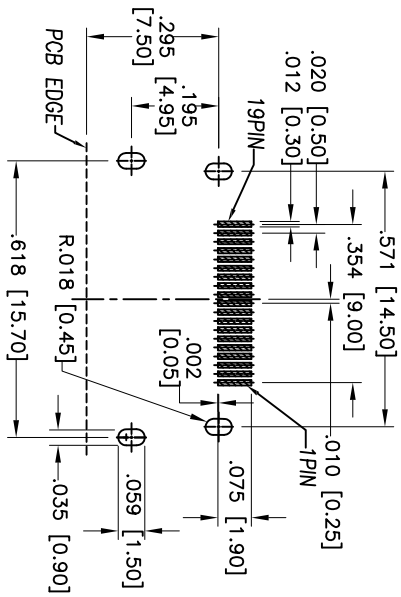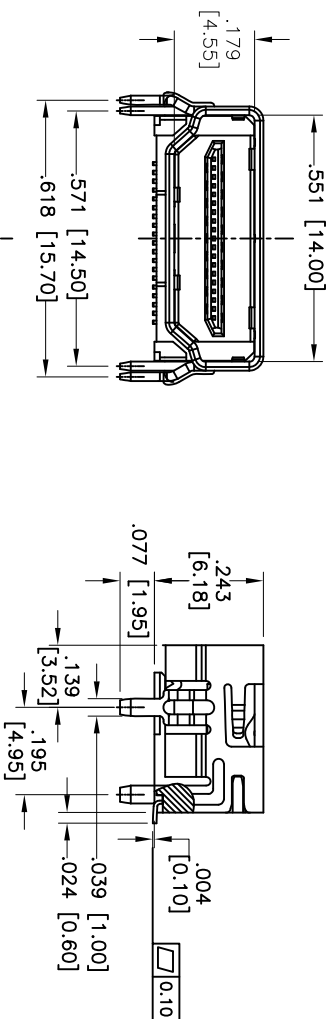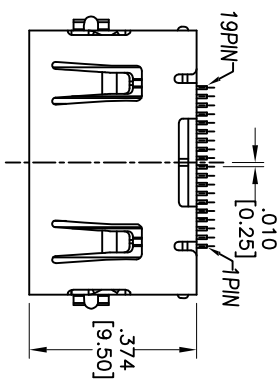

RECOMMENDED PCB LAYOUT (1:1.60mm)
 TOLERANCE UNSPECIFIED ±0.10mm

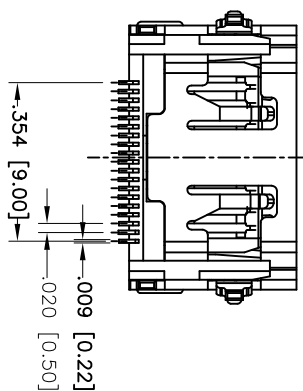

PACKAGED ON TAPE & REEL

SPECIFICATIONS:

Material: Housing: Hi-temp thermoplastic, UL 94V-0

Housing color: Black

Contact: Copper Alloy

Shield: Brass, Nickel plated

Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

Electrical:

Voltage rating: 40V

Current rating: 0.5A

Contact resistance: 30 mohms max.

Insulation resistance: 100 Megohm min.

Temperature Rating: Operating temperature: -20°C to +85°C

Environmental: Lead free, RoHS Compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE SINGLE, SMT TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES Holes ±.10 ±.020 ±.015 .XX ±.020 .XXX ±.015 .XXX ±.015		DATE	
APPROVALS	DATE	TITLE	
DRAWN AY	7/26/12	SIZE X	PART NO. HDML-S-RA-SMT-06-T/R
CHECKED CC	7/26/12	REF: S00075C	SCALE: NTS
APPROVED		SHEET 1 OF 1	REV. A

6

5

4

3

2

1

