



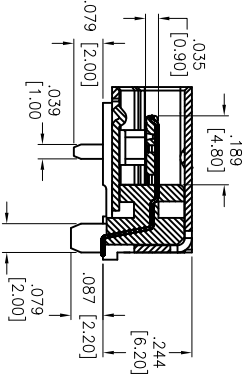

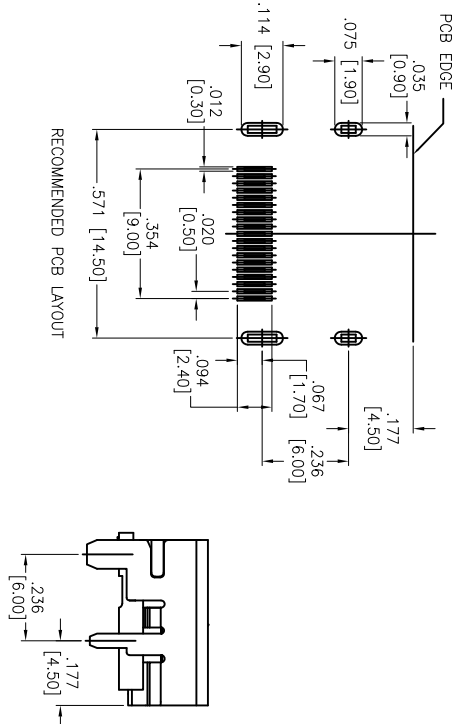


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/13/14	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

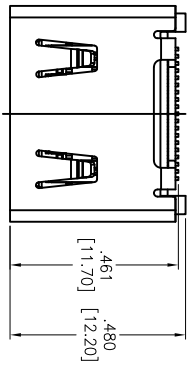

PACKAGED ON TAPE & REEL

**SPECIFICATIONS:**  
 Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Shell: Steel, Nickel plated  
 Plating: Gold flash over Nickel underplate on contact area, Matte Tin over Nickel underplate on Solder tails.  
 Electrical: Contact resistance: 30 mohms max  
 Insulation resistance: 100 Mohms min (UNMATE)  
 10 Mohms min (MATE)  
 Dielectric withstanding voltage: 300 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +85°C  
 Environmental: Lead free, RoHS compliant.

RECOMMENDED PCB LAYOUT

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES HOLEES  
 .X ± .10 ØXX ± .10  
 .XX ± .020 ØXXX ± .015  
 .XXX ± .015 ØXXXX ± .010

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE	SIZE	PART NO.	REV.
DRAWN	HR	8/13/14	X	HDMI-S-RA-SMT-08-T/R	-
CHECKED	YC	8/13/14	X		
APPROVED					

