

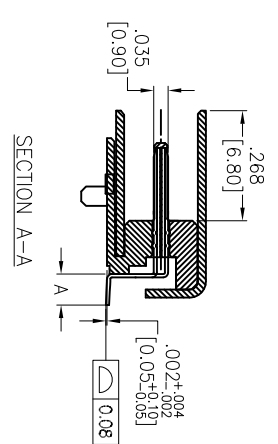
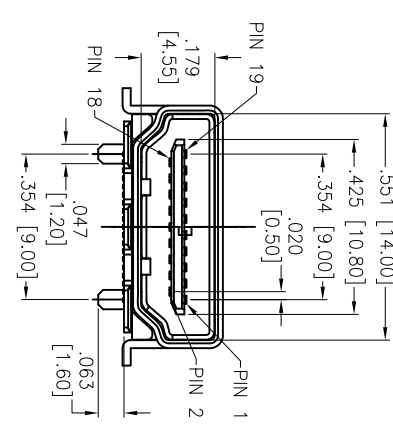



APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/14/14	
A		REVISED DIM.	6/20/14	AY/NP
B		REDRAWN	10/17/14	HR/JAC
C		UPDATE SHAPE	11/18/14	AY/JAC

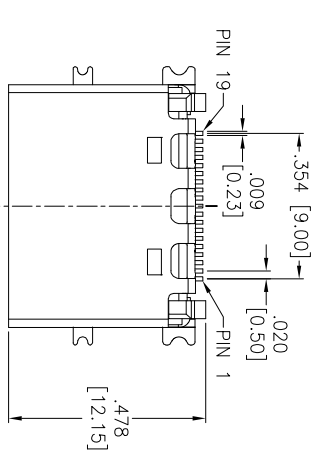

SPECIFICATIONS:
 Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Shell: SPCC, Gold flash plated
 Plating:
 Gold flash over Nickel underplate on contact area,
 Tin over Nickel underplate on Solder tails.
 Electrical:
 Operating voltage: 40 VAC max
 Current rating: 0.5 Amp Max.
 Contact resistance: 10 mohms max
 Insulation resistance:
 100 Mohms min @ 500 VDC (UNMATE)
 10 Mohms min @ 150 VDC (MATE)
 Dielectric withstanding voltage:
 500 VAC for 1 minute (UNMATE)
 300 VAC for 1 minute (MATE)
 Temperature Rating:
 Operating temperature: -55°C to +85°C
 Environmental:
 Lead free, RoHS compliant.

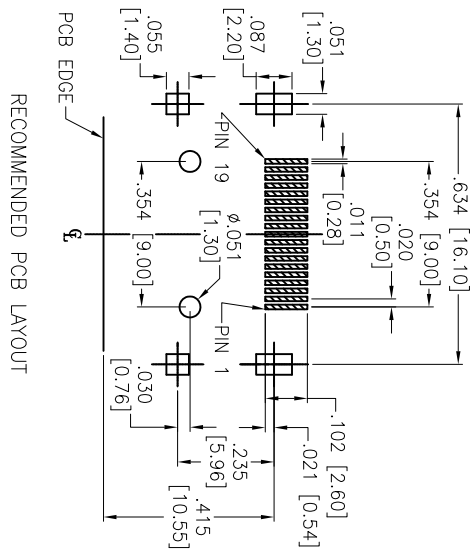

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN AY	5/14/14
CHECKED NP	5/14/14
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMI CONNECTOR, RIGHT ANGLE, SURFACE MOUNT

SIZE: X PART NO.: HDMI-S-RA6-TSMT

REF: S00097C SCALE: NTS SHEET 1 OF 1