
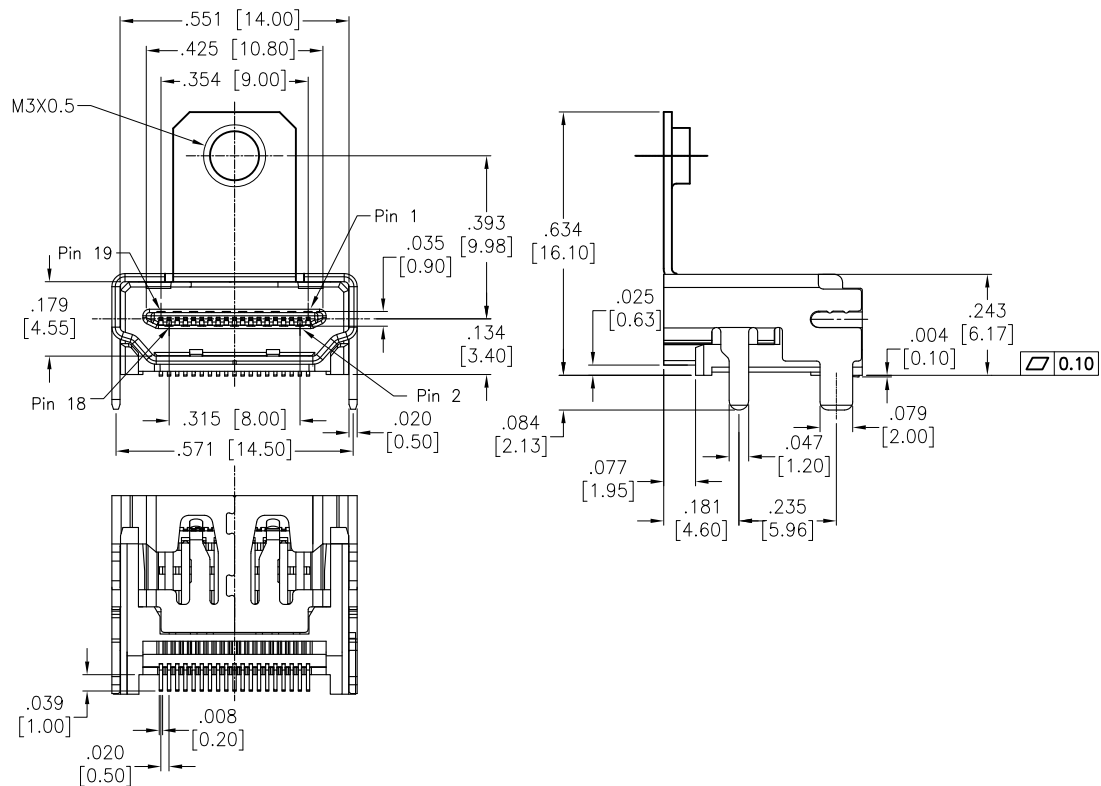
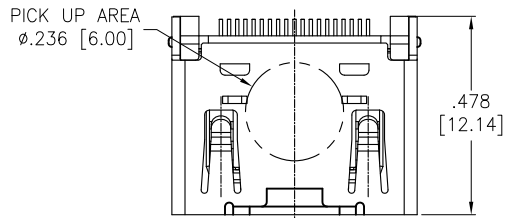
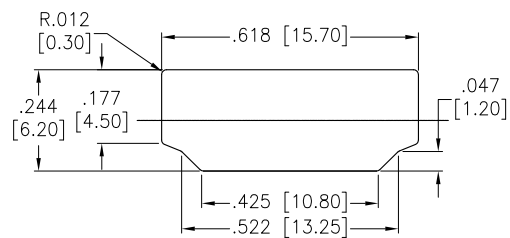


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/30/16	

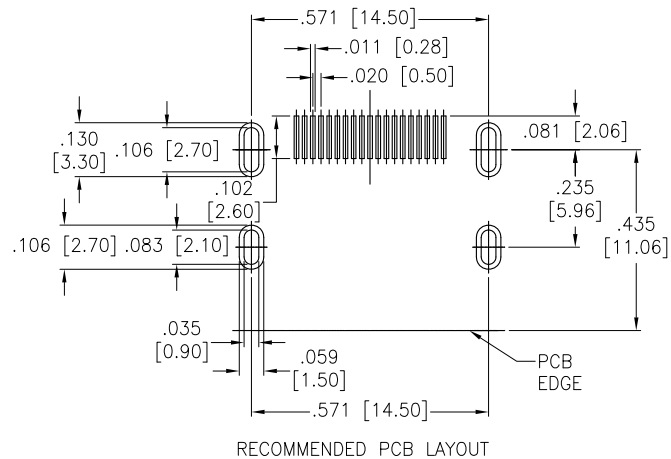

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Copper Alloy, Nickel plated
 Plating:

3u" Gold over Nickel underplate on contact area,
 Tin over Nickel underplate on Solder tails.

Electrical:
 Operating Current: 0.5A Max.
 Contact resistance: 10 mohms max.
 Insulation resistance: 100Mohm MIN.(UNMATED)
 10Mohm MIN.(MATED).

Dielectric withstanding voltage: 500Volts AC Between Adjacent Terminal(UNMATE)
 300Volts AC AC Between Adjacent Terminal(MATE)

Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES		HOLES
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	AY	6/30/16
CHECKED	YC	6/30/16
APPROVED		

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE HDMI CONNECTOR, RIGHT ANGLE, SURFACE MOUNT, W / FLANGE, W/O RIB		
SIZE X	PART NO. HDMI-S-RA6A-SMT-NR-MF-3-T/R	REV. -
REF: S00097C	SCALE: NTS	SHEET 1 OF 1