

6

5

4

3



2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/22/15	

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

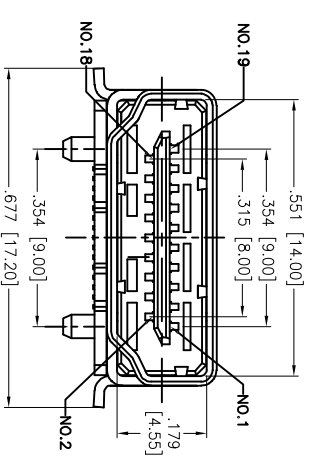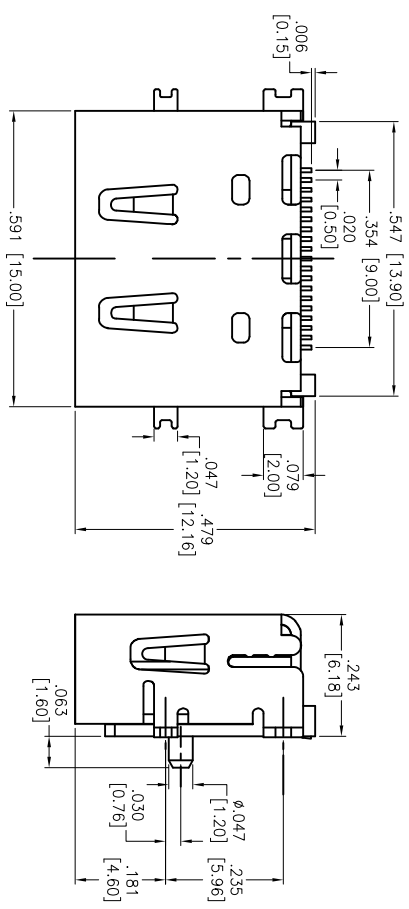

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**

**Material:**  
Housing: Hi-temp thermoplastic, UL 94V-0  
Housing color: Blue  
Contact: Copper Alloy  
Shield: Copper Alloy, Nickel plated  
Plating:

Gold over Nickel underplate on Contact area,  
Tin over Nickel underplate on Solder tails.

**Electrical:**  
Voltage rating: 40 VAC  
Current rating: 0.5A  
Contact resistance: 20 mohms max.  
Insulation resistance: 1000 Megohm min.  
Dielectric withstanding voltage: 500 VAC for 1 minute  
Temperature Rating:  
Operating temperature: -55°C to +105°C

**Environmental:**  
Lead free, RoHS Compliant

PACKAGED ON TAPE & REEL

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **HDMI CONNECTOR, RIGHT ANGLE, SMT TYPE, W/ POST, SEL-GOLD PLATED**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLDERS	
.X	± .10	ØX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	AY	6/22/15		HDMI-S-RA8-TSMT-BU	
CHECKED	NC	6/22/15		W/ POST, SEL-GOLD PLATED	
APPROVED				REV. -	
REF: S00073C		SCALE: NTS		SHEET 1 OF 1	



6

5

4

3

2

1