
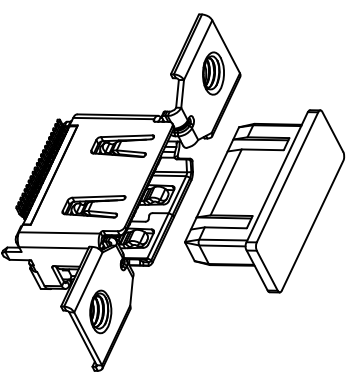
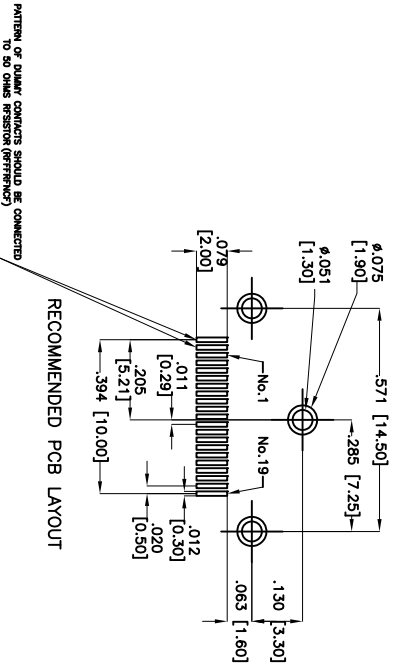
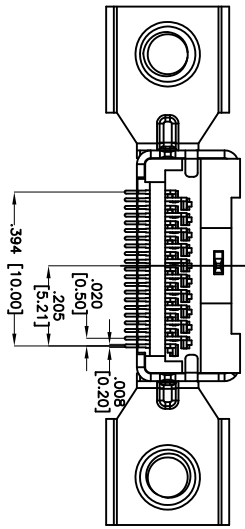
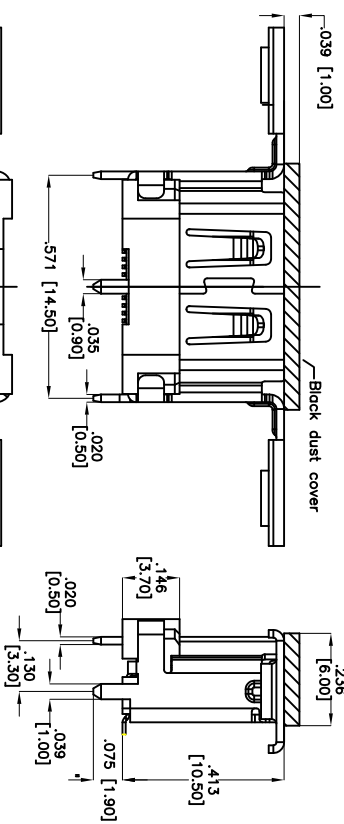


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/10/11	

APPROVED: _____
 DATE: _____ TITLE: _____

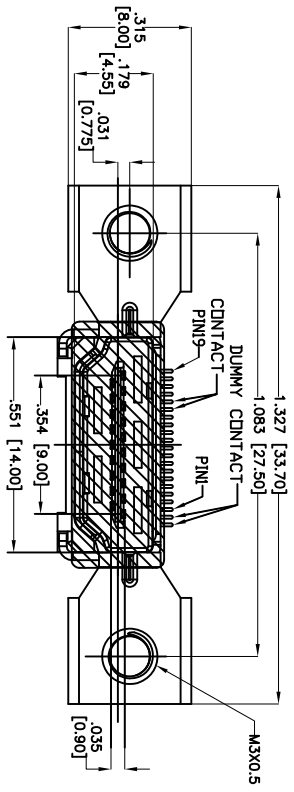

SPECIFICATIONS:

- Material: Housing: Hi-temp thermoplastic, UL 94V-0
- Housing color: Black
- Contact: Phosphor Bronze
- Shield: Brass, Nickel plated
- Plating: Gold flash over Nickel underplate on contact area, Tin over Copper underplate on tails.

- Electrical: Voltage rating: 40V AC
- Current rating: 0.5A Min
- Insulation resistance: 100 Megohm min @500 V DC
- Contact resistance: 30 mohms max.
- Dielectric withstanding voltage: 1,500 VAC for 1 minute

- Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 260°C for 5 seconds.

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
AY	5/10/11
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		HDMI CONNECTOR, VERTICAL, SMT, DUST COVER	
SIZE	PART NO.	HDMI-S-V-03-SMT-MF-DC	
X			
REF:	S00069C	SCALE:	NIS
		SHEET	1 OF 1