
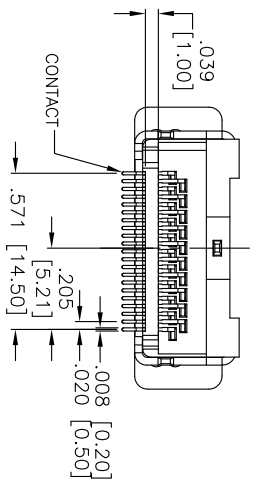
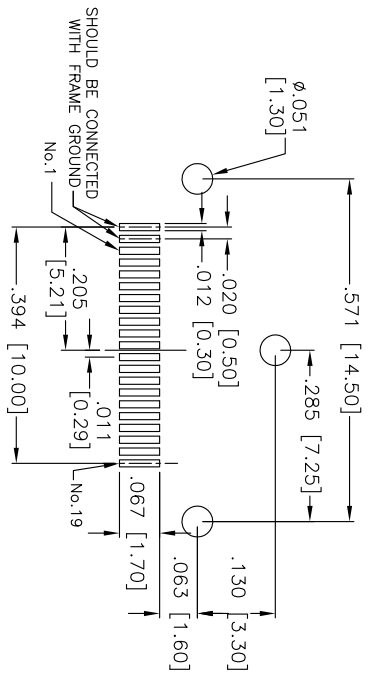
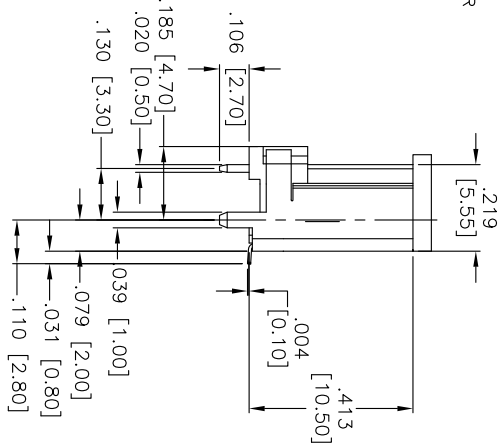
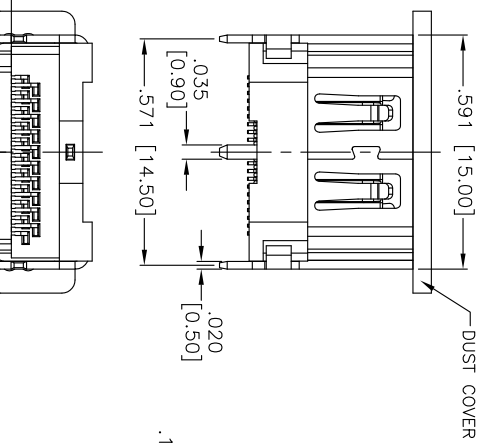


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/03/10	

APPROVED: _____
 DATE: _____ TITLE: _____

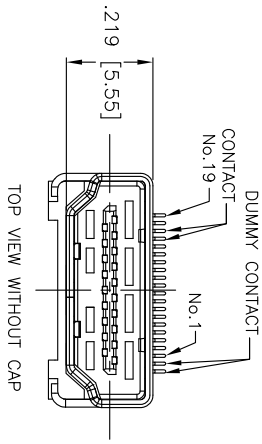

SPECIFICATIONS:

- Material:** Housing: Hi-temp thermoplastic, UL 94V-0
- Housing color: Black
- Contact: Phosphor Bronze
- Shield: Phosphor Bronze, Nickel plated.
- Plating: 15u" Gold over Nickel underplate on contact area, Tin over Nickel underplate on solder tails.
- Electrical:** Voltage rating: 40V
- Current rating: 0.5A
- Dielectric strength: 500VAC for 1 minute min.
- Insulation resistance: 100 Megohm min.
- Contact resistance: 30 mohms max.
- Environmental:** Lead free, RoHS Compliant
- Recommended soldering temp: 260°C for 5 seconds.

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	
.X	± .10
.XX	± .020
.XXX	± .015
.XXX	± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: **HDMI RECEPTACLE, VERTICAL, SMT TYPE WITH DUST COVER**

SIZE	PART NO.	REV.
X	HDMI-S-V-1-DC-15	-
REF:	S00009C	SCALE: NTS
SHEET 1 OF 1		