

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/13/14	

6

5

4

3


2

1

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

D

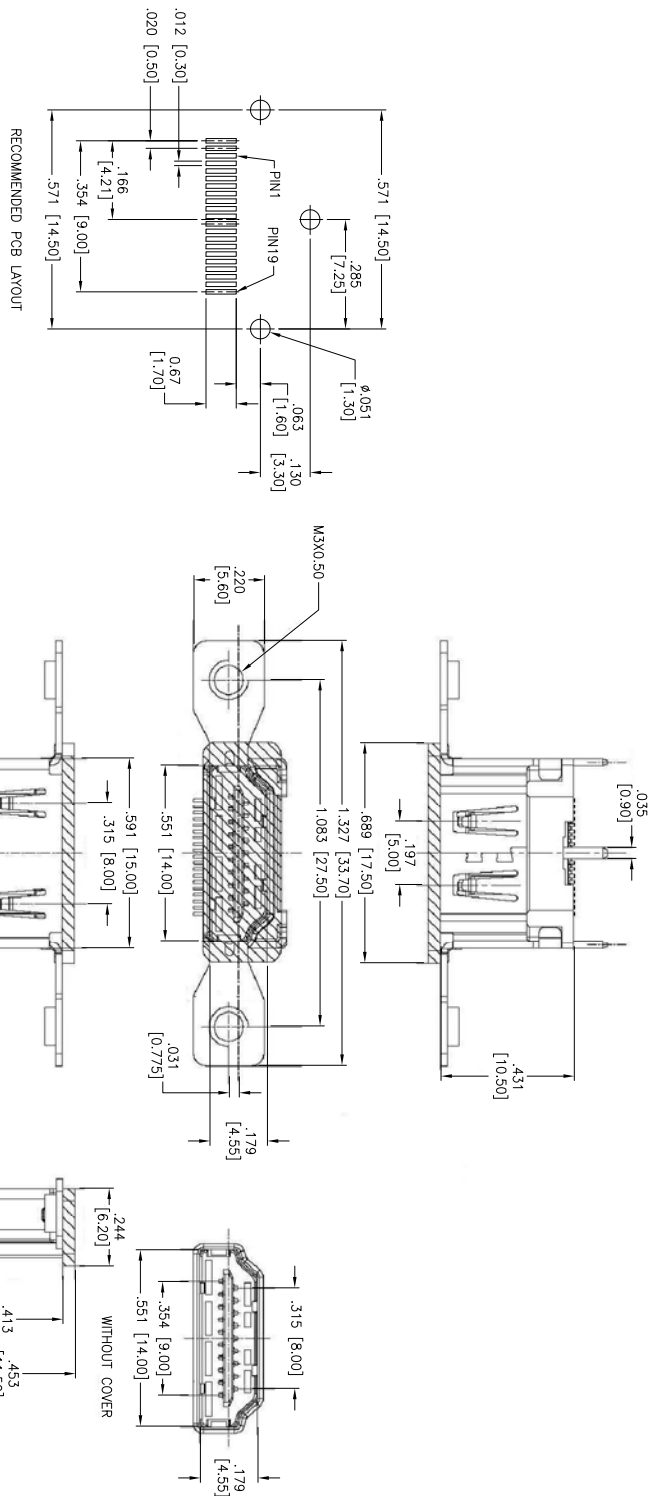

C

B

**SPECIFICATIONS:**



**Material:**  
 Insulator: Hi-Temp Thermoplastic, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Shell: Brass, Nickel plated  
 Plating:  
 Gold flash over Nickel underplate on contact area,  
 Matte Tin over Nickel underplate on Solder tails.

**Electrical:**

Operating voltage: 40 VAC max  
 Current rating: 0.5 Amp Max.  
 Contact resistance: 10 mohms max  
 Insulation resistance:  
 100 Mohms min @ 500 VDC (UNMATE)  
 10 Mohms min @ 150 VDC (MATE)

A

Dielectric withstanding voltage: 300 VAC for 1 minute  
 Temperature Rating:  
 Operating temperature: -20°C to +85°C  
 Environmental:  
 Lead free, RoHS compliant.

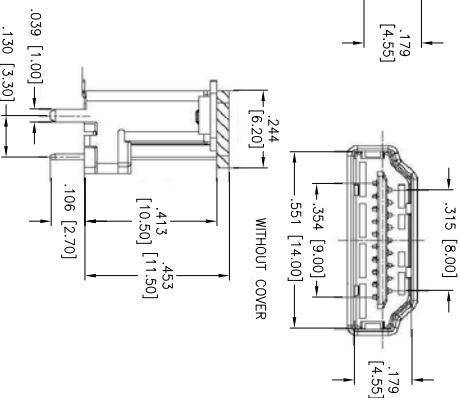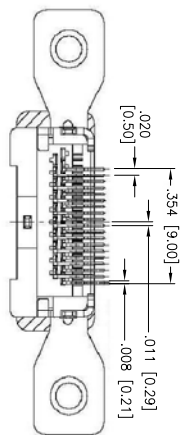

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

HDMI CONNECTOR, VERTICAL,  
 SURFACE MOUNT, W/FLANGE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	HR
CHECKED	YC
APPROVED	

SIZE	PART NO.	REV.
X	HDM-S-V-1-MF-01	-
REF: S00126T	SCALE: NTS	SHEET 1 OF 1

A

B

C

D

6

5

4

3

2

1

