
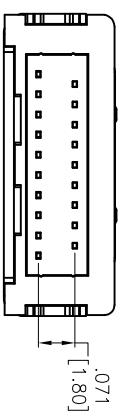
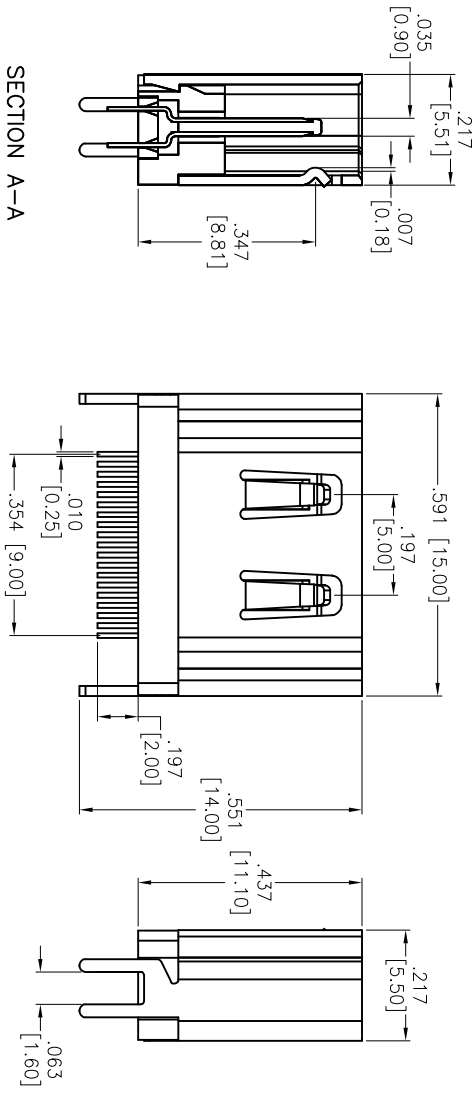


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/14	

APPROVED: _____
 DATE: _____ TITLE: _____

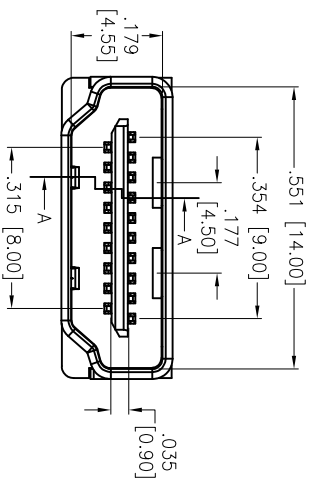

SPECIFICATIONS:

Material:
 Housing: Hi-Temp Thermoplastic, rated UL 94V-0, color: White
 Insert(Molding): Hi-Temp Thermoplastic, rated UL 94V-0, color: Black
 Retainer: Hi-Temp Thermoplastic, rated UL 94V-0, color: Black
 Contacts: Phosphor Bronze
 Shell: Brass, Nickel plated
 Plating:
 Gold over Nickel underplate on contact area,
 Tin over Nickel underplate on Solder tails.

Electrical:
 Operating voltage: 30 VAC max
 Current rating: 0.5 Amp Max.
 Contact resistance: 30 mohms max
 Insulation resistance: 100 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HDMl-S-V-1-SM STRADDLE MOUNT, VERTICAL, THRU-HOLE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZES		DATE	
.X	± .10	ØX	± .10	ØXXX	± .015	XXX	± .010
APPROVALS							
DRAWN	AY	5/5/14	5/5/14	SIZE	PART NO.	REV.	
CHECKED	SC	5/5/14	5/5/14	X	HDMl-S-V-1-SM	-	
APPROVED				REF:	S00097C	SCALE:	NTS