

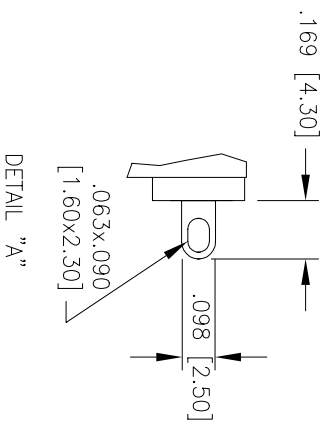
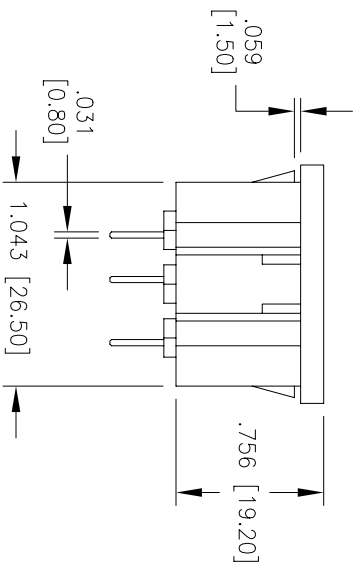
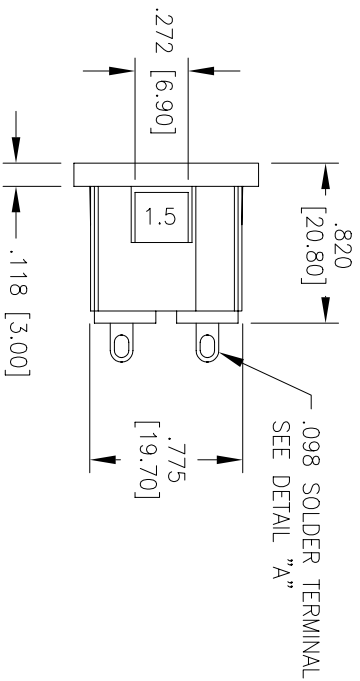


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/27/04	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

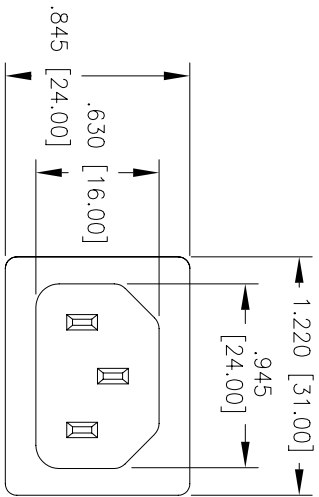

**SPECIFICATIONS:**

**Material:**

Insulator: Nylon 66, rated UL 94V-0, black  
 Contacts: Brass QQ-B-626

**Plating:**

Contacts: 50 µin bright nickel to QQ-N-290, Class2, Grade C  
 Terminals: 100 µin min bright tin plate to MIL-T-10727, Type 1 with 50 µin min copper underplate to MIL-C-14550

**Electrical:**

Operation voltage: 250 VAC max  
 Current rating: 15 A max  
 Insulation resistance: 100 Mohm min @ 500 VDC  
 Dielectric withstanding voltage: 2000 VAC for 1 min.

**Environmental:**

Operating temperature: -40°C to +150°C  
 Packaging: Anti-static plastic bags or corrugated boxes

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC 60320 C14 MALE, SNAP IN, 1.50mm  
 PANEL, .098 SOLDER TERMINALS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		HOLE SIZES		DATE	
.XX	± .10	ØXX	± .10	DATE	
.XX	± .020	ØXX	± .015	DATE	
.XXX	± .015	ØXXX	± .010	DATE	
APPROVALS		DATE		DATE	
DRAWN	BS	4/27/04		DATE	
CHECKED				DATE	
APPROVED				DATE	

SIZE: IEC-C-3-150

PART NO.

SCALE: NTS

REV.:

SHEET 1 OF 1