


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/20/13	
A		REVISED DIM.	3/17/14	HR/QZL
B		REVISED DIM.	4/30/15	AY/KW

APPROVED: _____
 DATE: _____ TITLE: _____

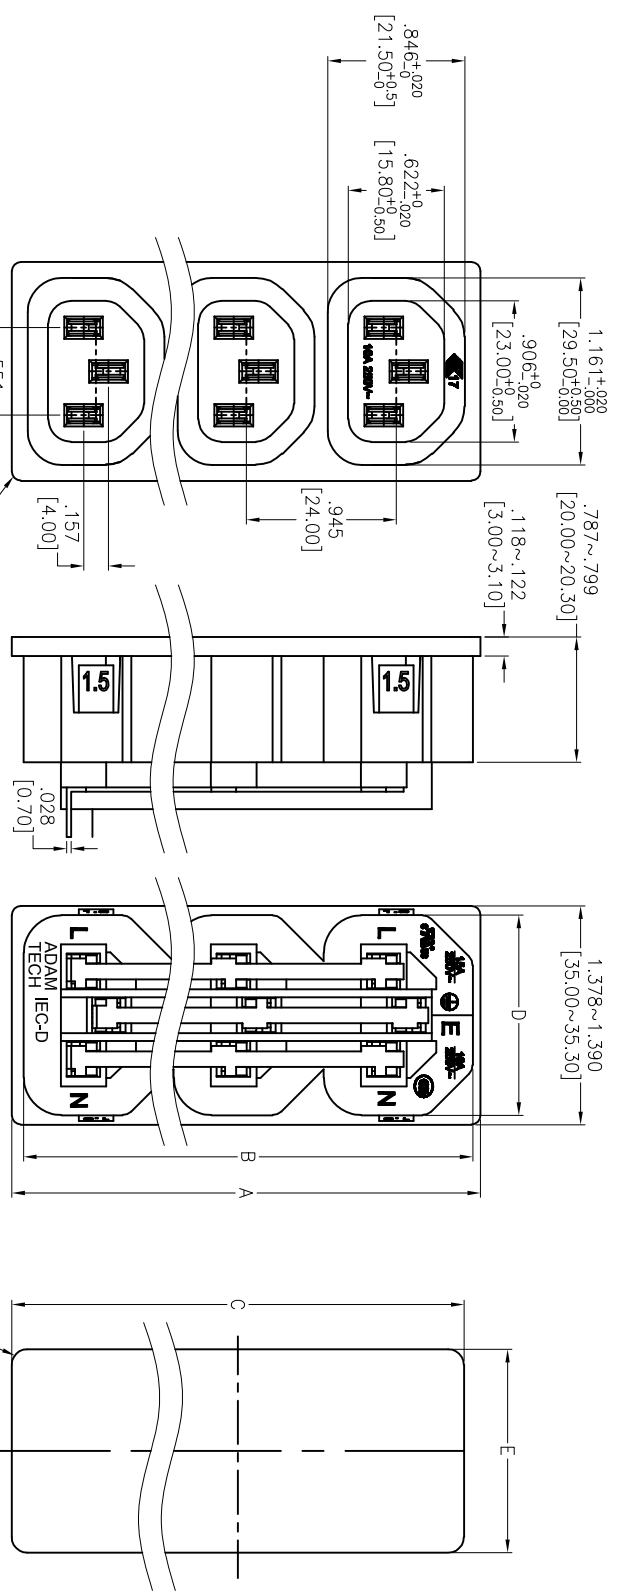

PART NUMBER	PORTS	DIMENSIONS				
		A	B	C	D	E
IEC-D-S2-150	2	2.008 [51.00]	1.902 [48.30]	1.935 [49.16]	1.260 [32.00]	1.268 [32.20]
IEC-D-S3-150	3	2.972 [75.50]	2.882 [73.20]	2.890 [73.40]	1.295 [32.90]	1.303 [33.10]
IEC-D-S4-150	4	3.898 [99.00]	3.799 [96.50]	3.811 [96.80]	1.260 [32.00]	1.280 [32.50]
IEC-D-S5-150	5	4.843 [123.00]	4.724 [120.00]	4.736 [120.30]	1.260 [32.00]	1.280 [32.50]
IEC-D-S6-150	6	5.787 [147.00]	5.669 [144.00]	5.681 [144.30]	1.260 [32.00]	1.280 [32.50]

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

IEC FEMALE OUTLET STRIP
 SNAP-IN PANEL MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED INCHES		HOLE SIZES	
.X	± .10	ØX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS					
DRAWN	HR	DATE	12/20/13	SIZE	PART NO.
CHECKED	GC	DATE	12/20/13	REF: X	IEC-D-SX-150
APPROVED		DATE		SCALE: NTS	SHEET 1 OF 1

SPECIFICATIONS:
 Material: Insulator: Nylon 66, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper
 Plating: Tin over Copper underplate overall
 Electrical: Operating voltage: 250 VAC
 Current rating: C-ULus: 15 Amps max
 ENEC & CCC: 10 Amps max
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 3,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -25°C to +70°C
 Environmental: Lead free, RoHS compliant

