

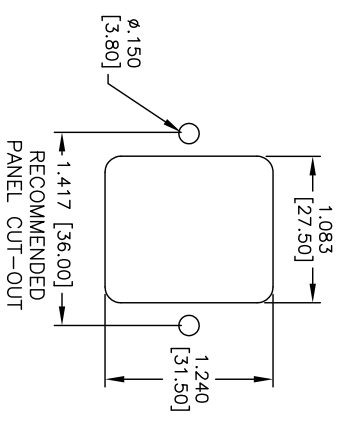
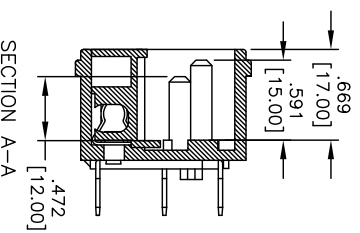
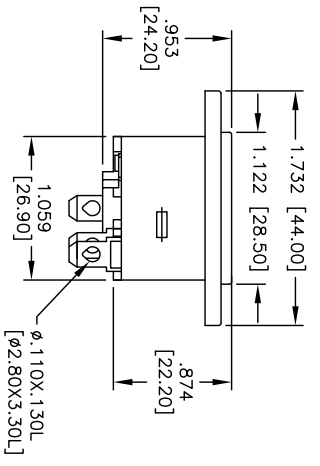


Rev	AWO #	Description	Date	Appr
-		RELEASED	09/22/04	
A		REVISED MARK	2/24/10	
B		REDRAWN	9/19/11	

APPROVED: _____
DATE: _____ TITLE: _____

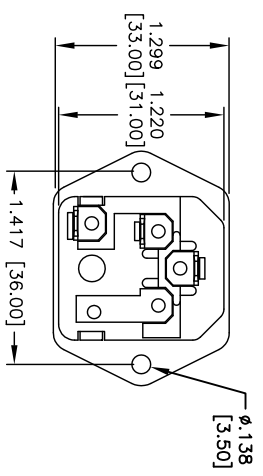

SPECIFICATIONS:
Material: PBT, glass reinforced, rated UL 94V-0
Insulator Color: Black
Contacts: Brass
Soldering: Brass, Matte Tin Plated
Plating: Tin over Copper underplate overall
Electrical:
Operating Voltage: 125/250V AC
Current Rating: UL: 10/15 Amps Max,
Insulation Resistance: 100 MO Min. @ 500V DC
Dielectric Withstanding Voltage: 2000V AC for 1 Minute
Temperature Rating:
Operation Temperature: -25°C ~ +70°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

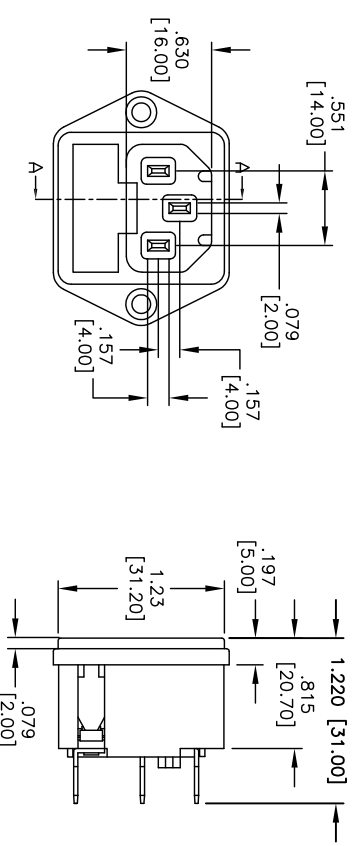

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN BAS	09/22/04
CHECKED	
APPROVED	

ADAM TECH	
909 Railway Avenue, Union, NJ 07083	
Phone: 908-687-5000 Fax: 908-687-5710	
TITLE	IEC connector, F body, .187 Quick Connect terminals
SIZE	PART NO. IEC-F-1
REF: S00037T	SCALE: NTS
SHEET 1 OF 1	REV. B