

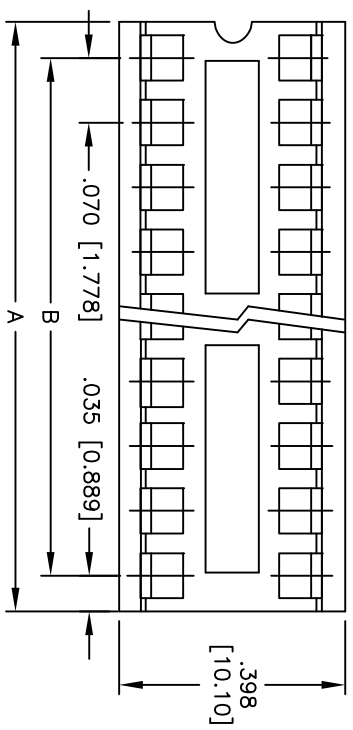


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/5/11	

APPROVED: _____
 DATE: _____ TITLE: _____

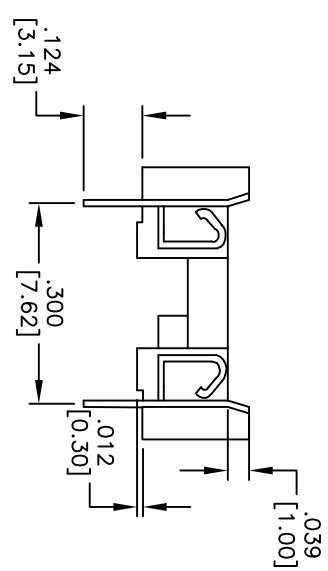

Positions	A	B
16	.560 [14.22]	.490 [12.45]
20	.700 [17.78]	.630 [16.00]
22	.770 [19.56]	.700 [17.78]
24	.840 [21.34]	.770 [19.56]

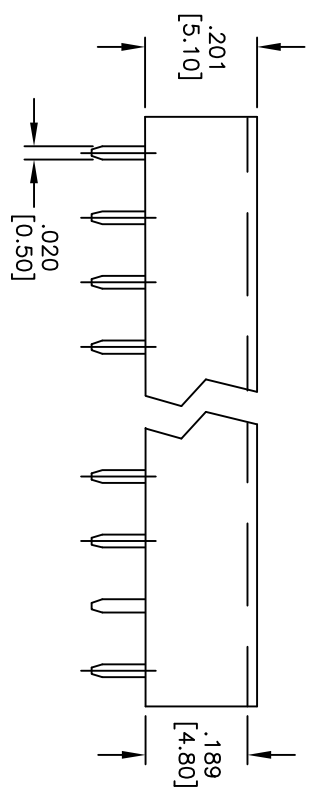

SPECIFICATIONS:

Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall

Electrical:
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 5,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Insertion Force: 45g max per contact
 Withdrawal Force: 14.5g min per contact
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IC SHRINK DIP SOCKET, 16, 20, 22, 24PIN
 .300" ROW SPACING, TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	
DRAWN	AY 8/5/11
CHECKED	AH 8/5/11
APPROVED	

SIZE	PART NO.	REV.
X	ISD-3XX-T	-
REF:	S00190T	
SCALE:	NTS	
SHEET	1 OF 1	