

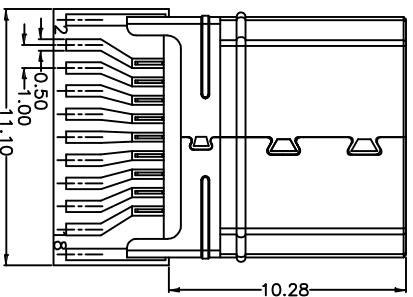
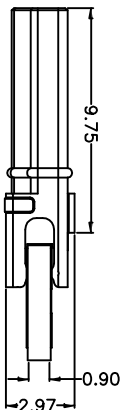
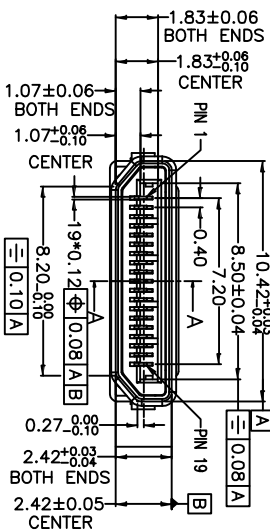


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/07/10	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
DATE: \_\_\_\_\_

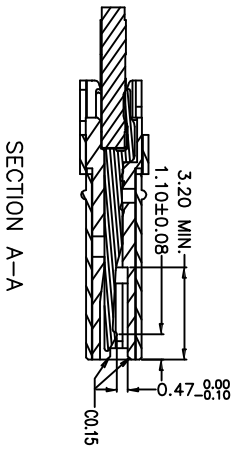

**SPECIFICATIONS:**  
**Material:**  
Housing: Hi-temp thermoplastic, UL 94V-0  
Housing color: Black  
Contact: Copper Alloy  
Shield: Copper Alloy, Nickel plated  
Plating:  
Gold flash over Nickel underplate on contact area,  
Tin over Copper underplate on tails.  
**Electrical:**  
Voltage rating: 40V  
Current rating: 0.5A  
Dielectric strength: 300VAC for 1 minute min.  
Insulation resistance: 100 Megohm min.  
Contact resistance: 10 mohms max.  
**Environmental:**  
Lead free, RoHS Compliant

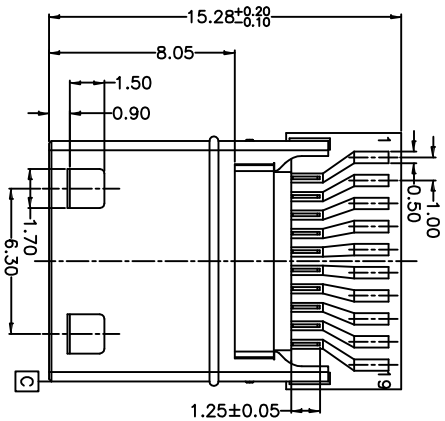

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE MM  
TOLERANCES: EXCEPT AS NOTED  
INCHES

ØXX ±.10  
ØXXX ±.015  
XXX ±.015

ADAM TECH  
909 Railway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

MINI HDMI C TYPE, 19P, PLUG

APPROVALS	DATE
DRAWN DY	6/07/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MHDMI-PLUG-0M1	-
REF: S00019C	SCALE: NTS	SHEET 1 OF 1