Rev	AWO #	Description	Date	Appr
-		RELEASED	03/25/13	

APPROVED: _____

DATE: _____ TITLE: _____

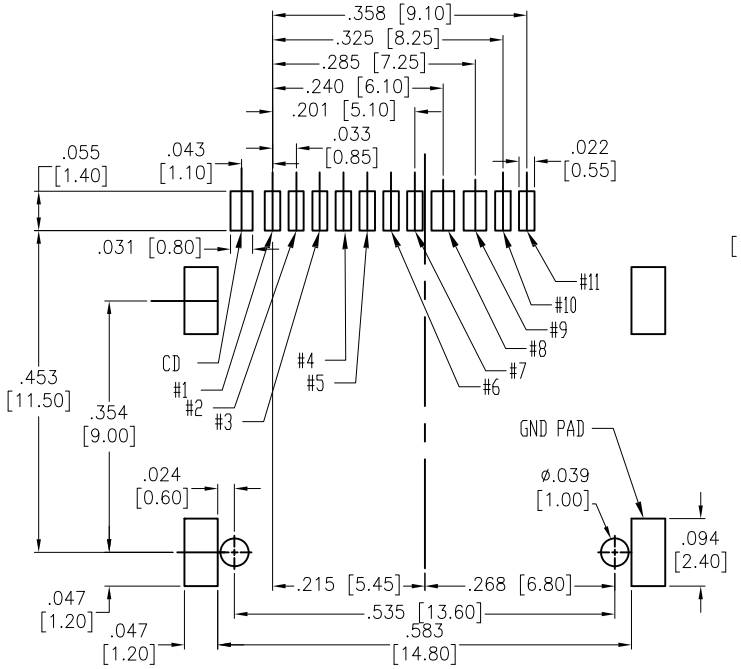

RECOMMENDED PCB LAYOUT

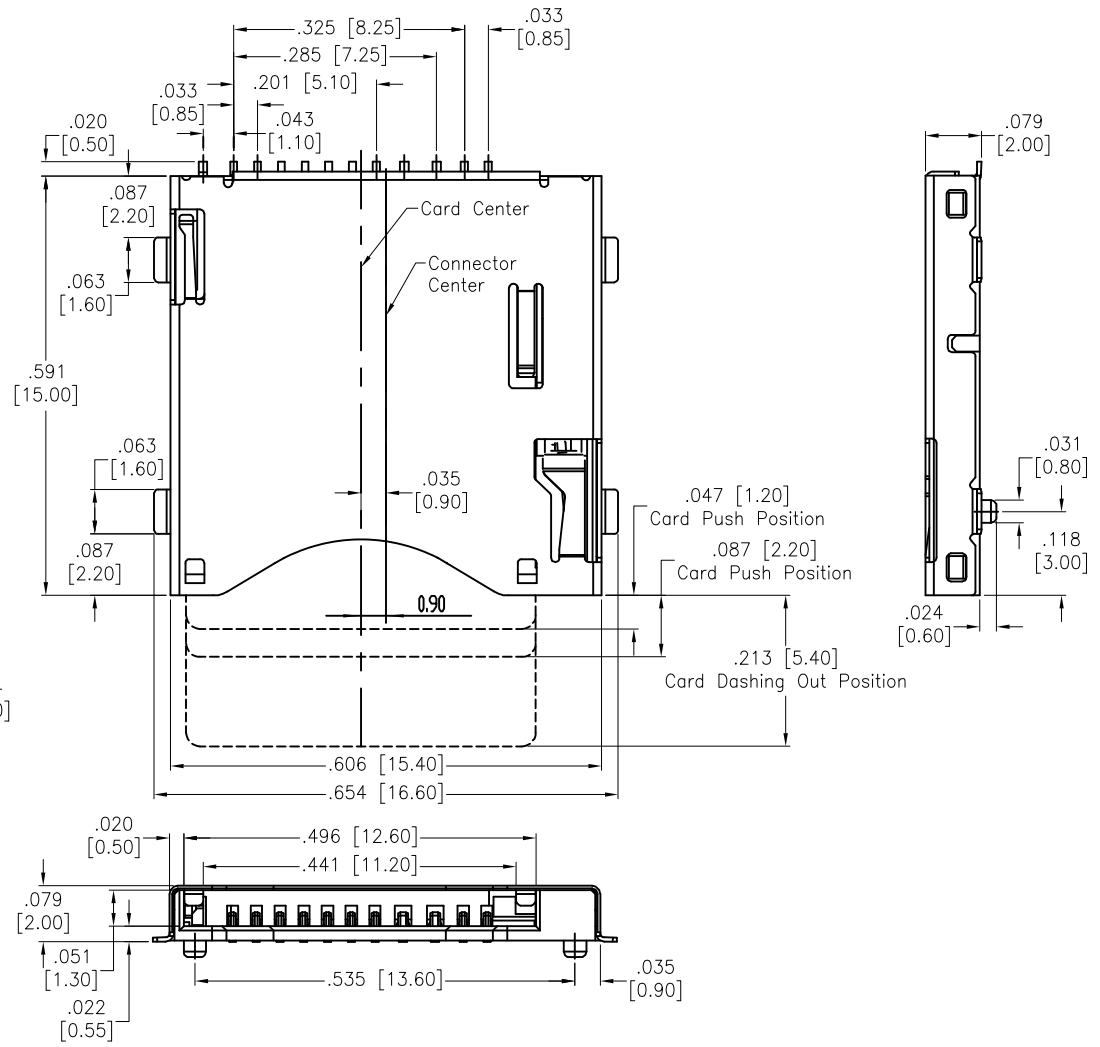

SPECIFICATIONS:
Material:
Insulator: Hi–Temp Thermoplastic, rated UL 94V–0
Insulator color: Black
Contacts: Phosphor Bronze
Plating:
Gold over Nickel underplate in contact area,
Tin over Copper underplate on solder tails
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Contact resistance: 100 mohms max
Insulation resistance: 1,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Environmental:
Lead free, RoHS compliant

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	TW	03/25/13
CHECKED	NP	03/25/13
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MICRO MEMORY STICK, PUSH-PUSH TYPE SEL-GOLD PLAYED

SIZE	PART NO.	REV.
X	MMSP-11-A-SG	-

REF: S00009T | SCALE: NTS | SHEET 1 OF 1