

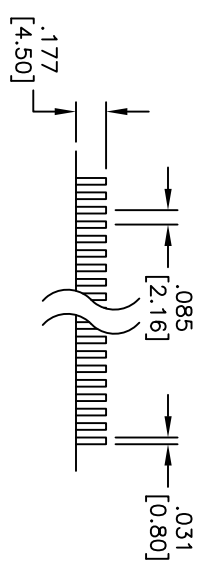
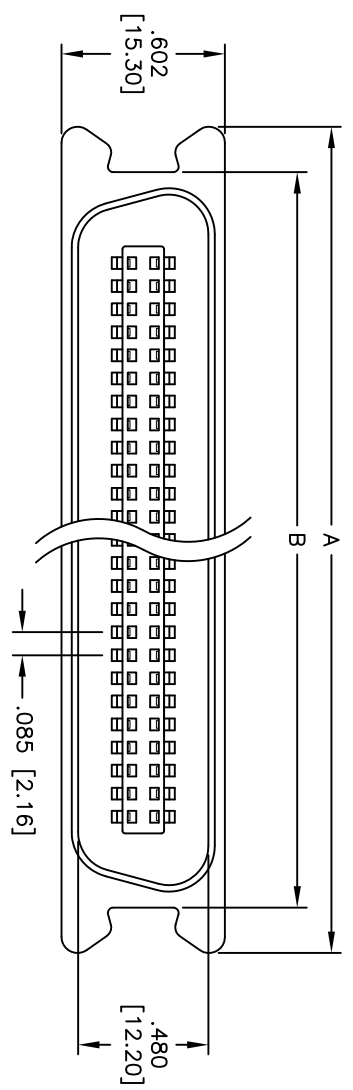


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/20/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

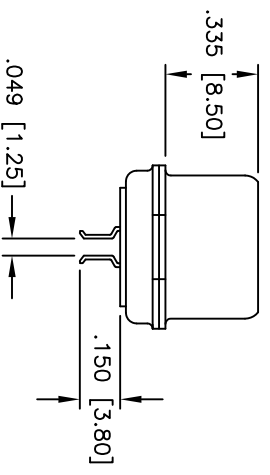

EDGE OF PC BOARD

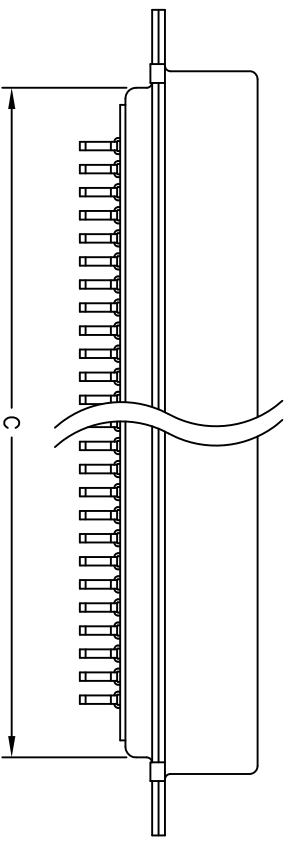

MRXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
MR14	14	1.516 [38.50]	1.157 [29.40]	.862 [21.90]
MR24	24	1.941 [49.30]	1.583 [40.20]	1.287 [32.70]
MR36	36	2.441 [62.00]	2.106 [53.50]	1.803 [45.80]
MR50	50	3.047 [77.40]	2.689 [68.30]	2.406 [61.10]

**SPECIFICATIONS:**

Material: Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Blue  
 Contacts: Phosphor Bronze  
 Shell: Steel, Nickel plated  
 Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails  
 Electrical: Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 25 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -55°C to +105°C  
 Environmental: Lead free, RoHS compliant

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINIATURE RIBBON PLUG  
 STRADDLE MOUNT TAILS, NOTCH EARS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	SS	5/20/05	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE	REV.
X	MRXX-PG-2	NTS	-
REF:		SHEET	1 OF 1