
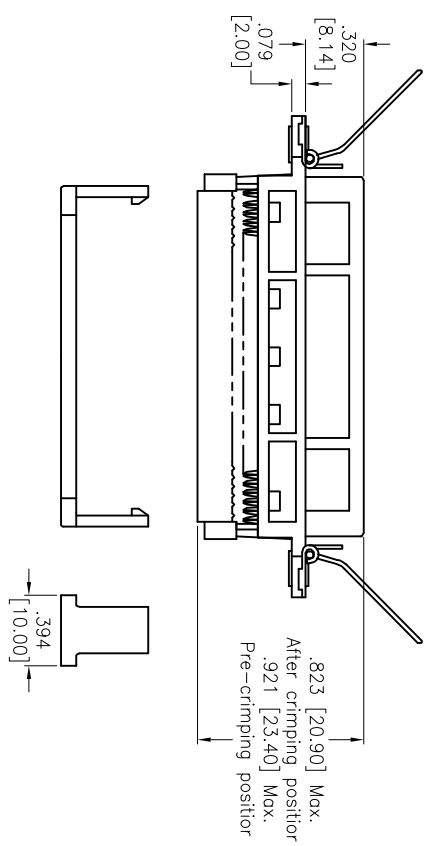


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/19/05	
A		REDRAWN	03/15/12	

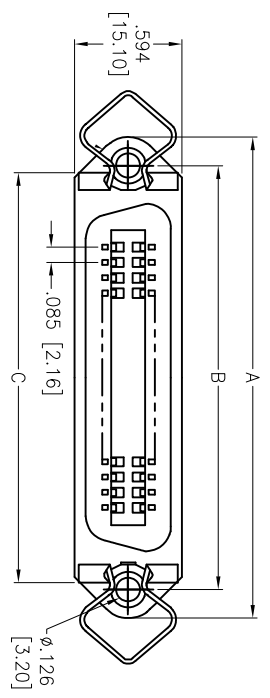

MRXX	NO. OF CONTACTS	DIMENSIONS		
		A	B	C
MR24	24	2.154 [54.70]	1.842 [46.78]	1.798 [45.68]
MR36	36	2.669 [67.80]	2.352 [59.74]	2.309 [58.65]
MR50	50	3.260 [82.80]	2.947 [74.85]	2.904 [73.75]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IDC MINIATURE RIBBON SOCKET
 PLASTIC BODY

SPECIFICATIONS:
 Material: Insulator: PBI, glass reinforced, rated UL 94V-0
 Insulator color: Blue
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate on mating area, Tin over Copper underplate on tails
 Electrical: Operating voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 35 mohms max
 Insulation resistance: 1,000 Mohms min
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED INCHES		HOLE SIZES	
.X	$\pm .10$	ϕX	$\pm .10$.XX	$\pm .020$
.XX	$\pm .020$	ϕXX	$\pm .015$.XXX	$\pm .015$
.XXX	$\pm .015$	ϕXXX	$\pm .010$	DATE	
APPROVALS		DATE			
DRAWN	SS	5/19/05			
CHECKED					
APPROVED					
SIZE	PART NO.	MRXX-SE-1	SCALE:	NTS	SHEET 1 OF 1
REV.		A			

