

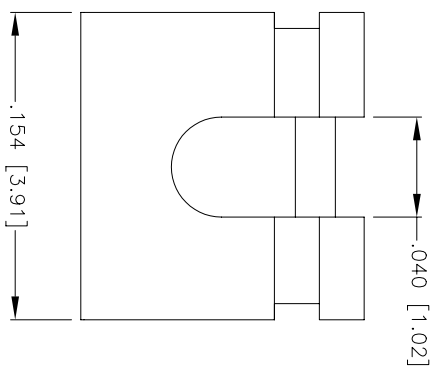


Rev	Description	Date	Appr
-	Released	5/4/04	

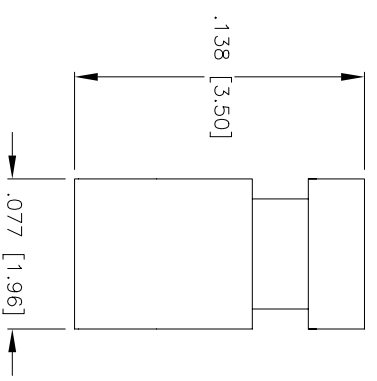

SPECIFICATIONS:

Material:

Insulator: PolybutyleneTerephthalate(PBT), glass reinforced thermoplastic, rated UL94V-0, Color: Black

Contacts:

Copper Alloy

Plating:

T = 100 μin bright tin plate to MIL-T-10727, Type 1 over 50 μin nickel underplate to QQ-N-290, Class 2, Grade C
 G = 5 μin gold to MIL-G-45204, Type II, Grade C on contact area over 50 μ" nickel underplate to QQ-N-290, Class 2, Grade C, gold flash on balance.

Electrical:

Operation voltage: 250 VAC max
 Current rating: 1 Amp max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 600 VAC / minute

Mechanical:

Lead size range: .022" sq. to .028" sq.
 Environmental:
 Operating temperature: -55°C to +105°C

ADAM TECH		DESCRIPTION : Mini Shunt .079" Centerline	
		PART NUMBER : MS2B-XX	
Dimension in IN [MM]		DRAWN : SS	
Tolerance (Unless Otherwise Specified) XX ± .01 XXX ± .005		APPR : -	
Date: 5/4/04		SCALE : NTS	
SHEET 1		LOG -	
OF 1 SHEETS		REF. -	
REV. -			